


# Cable Specifications: 2.0mm 2nd Buffer Breakout Tubing

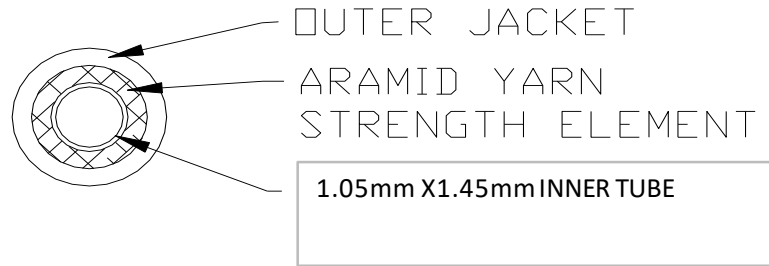

## I.) Construction

### A) Component

- 1) .041" X .057" (1.05mm X 1.45mm) Polypropylene Tubing +/- .002" (.05mm)
- 2) Tubing Color: Natural

### B) Strength Members

- 1) Dielectric Aramid Yam Fibers

### C) Jacket Color: Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua

### D) Jacket: Flame Retardant PVC

## II.) Performance

### B) Mechanical

- 1) Diameter: .079" (2.0mm) +/- .003" (.08mm)
- 2) Tensile Load:
  - a) 10 lbs. (44N) Max. - (Installation)
  - b) 3 lbs. (13N) Max. -(Operating)
- 3) Minimum Bend Radius:
  - a) 1.58" (4.01cm) - Installation
  - b) .79" (2.0cm) - In Service
- 4) Cable Weight: 1.7 lbs/1000ft (2.54kg/km)
- 5) Operating Temperature: -4F to 158F (-20C to 70C)
- 6) Storage Temperature: -40F to 185F (-40C to 85C)

rev. 2	3/19/15



45 Danco Rd Putnam, CT 06260  
 Phone 888-748-6855 Fax 508-987-9287

**Part No. C200153-XXX**

This drawing is the property of OPTICONX Inc. All information is Proprietary and cannot be reproduced without written consent by OPTICONX Inc.