





Fiber Optic Furcation Tubing

2.0mm Round Duplex Breakout Tubing

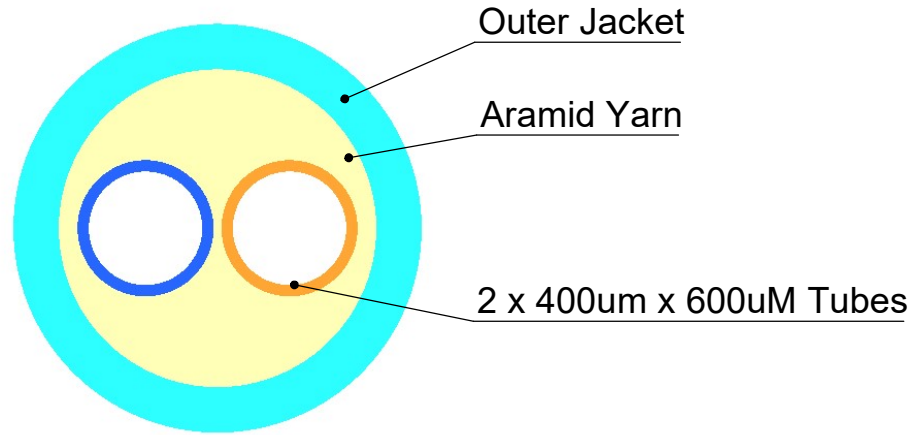

703DUP-XXX

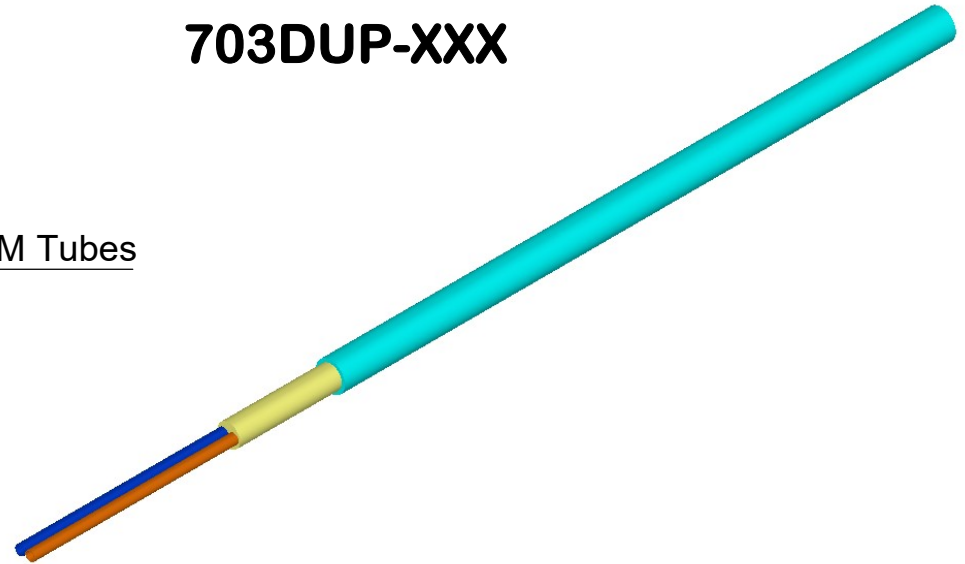

Mechanical:

Diameter: 0.079" (2.0mm) +/- 0.003" (0.08mm)

Tensile Load:

30 lbs (133N) Max.-Installation

10 lbs (44N) Max.-In Service

Minimum Bend Radius:

2.0" (5.0cm)-Installation

1.0" (2.5cm)-In Service

Cable Weight: 3.4lbs/1000ft. (5.07kg/km)

Operating Temperature: 0F to 158F (-18C to 70C)

Storage Temperature: -40F to 185F (-40C to 85C)

Component

Two Tubes @ 0.016" x 0.024" (0.4mm x 0.6mm)

Polypropylene +/- 0.002" (0.05mm)

Strength Members

Dielectric Aramid Yarn Fibers

Jacket Color:

Blue, Orange, Green, Brown, Gray, White,
Red, Black, Yellow, Violet, Pink, Aqua

Jacket:

Flame Retardant PVC

Print: per request

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

Applications Note:

This fiber cable is designed for use with 2mm uniboot type connectors.

www.opticonx.com

Drawn By: PCS
Approved By: PL
Date: 12/05/14
Rev: A