

OVERVIEW

All TRANS PIR based Occupancy Sensors feature with interchangeable lens options. Each lens provides different sensing coverage which varies with the actual mounting height.

The specified detection coverage and mounting height of each lens are based on the test result of human motion walking across the detection zones. The actual coverage may be reduced if the motion is moving toward or away the sensor. High ambient temperature (above 28°C/82°F) could reduce the coverage of PIR sensor. If ambient temperature at the covered area are expected to be high sometimes, consider adding more sensors or reduce the mounting height, if possible.



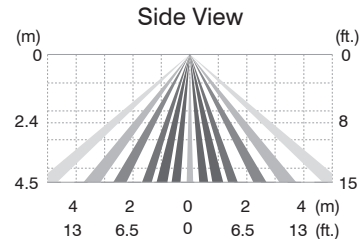


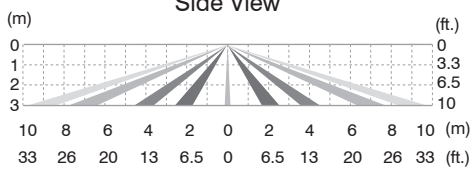


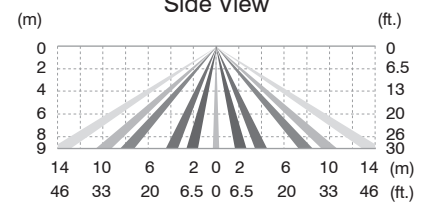
The followings are all available lens options and their respective detection patterns at printing time. For details of latest lens options available, please visit www.irtec.com.

LENS OPTIONS

Lens		Shape	Recommended Mounting Height		Coverage
A	Standard	Cone	2.4~4.5m	8~15 ft.	2X height
B	Extra wide	Cone	2.4~3.0m	8~10 ft.	6X height
C	High bay	Cone	4.5~9.0m	15~30 ft.	3X height
D	Standard	Round flat	2.4~6.0m	8~20 ft.	2X height
F	Extra wide	Dome	2.4~6.0m	8~20 ft.	4X height
G	Aisle way	Arch	2.4~12.0m	8~40 ft.	3X height





NOTE:

- Lens G can be rotated to change its direction of coverage. Its 3X height coverage refers only to the total length, the width of coverage will vary with the mounting height (see table of Lens G section). This lens is not IP-66 rated.
- Lens C/G may be mounted up to 12/15m (40/50 ft.) or higher at the area, providing with large moving object such as forklift trucks. Before installing all sensors, please ensure that the sensor can have optimal detection at desired height.

LENS A 	2X Standard Top View 	<table border="1"> <tr> <td>Mounting Height</td> <td>m (ft.)</td> <td>2.4 (8)</td> <td>3.0 (10)</td> <td>3.6 (12)</td> <td>4.5 (15)</td> </tr> <tr> <td>Max. Coverage Diameter</td> <td>m (ft.)</td> <td>4.8 (16)</td> <td>6.0 (20)</td> <td>7.2 (24)</td> <td>9.0 (30)</td> </tr> </table>	Mounting Height	m (ft.)	2.4 (8)	3.0 (10)	3.6 (12)	4.5 (15)	Max. Coverage Diameter	m (ft.)	4.8 (16)	6.0 (20)	7.2 (24)	9.0 (30)
		Mounting Height	m (ft.)	2.4 (8)	3.0 (10)	3.6 (12)	4.5 (15)							
Max. Coverage Diameter	m (ft.)	4.8 (16)	6.0 (20)	7.2 (24)	9.0 (30)									
														
LENS B 	6X Extra wide Top View 	<table border="1"> <tr> <td>Mounting Height</td> <td>m (ft.)</td> <td>2.4 (8)</td> <td>2.6 (8.5)</td> <td>2.8 (9)</td> <td>3.0 (10)</td> </tr> <tr> <td>Max. Coverage Diameter</td> <td>m (ft.)</td> <td>14.4 (48)</td> <td>15.6 (51)</td> <td>16.8 (54)</td> <td>18.0 (60)</td> </tr> </table>	Mounting Height	m (ft.)	2.4 (8)	2.6 (8.5)	2.8 (9)	3.0 (10)	Max. Coverage Diameter	m (ft.)	14.4 (48)	15.6 (51)	16.8 (54)	18.0 (60)
		Mounting Height	m (ft.)	2.4 (8)	2.6 (8.5)	2.8 (9)	3.0 (10)							
Max. Coverage Diameter	m (ft.)	14.4 (48)	15.6 (51)	16.8 (54)	18.0 (60)									
														
LENS C 	3X High bay Top View 	<table border="1"> <tr> <td>Mounting Height</td> <td>m (ft.)</td> <td>4.5 (15)</td> <td>6.0 (20)</td> <td>8.0 (26)</td> <td>9.0 (30)</td> </tr> <tr> <td>Max. Coverage Diameter</td> <td>m (ft.)</td> <td>13.5 (45)</td> <td>18.0 (60)</td> <td>24.0 (78)</td> <td>27.0 (90)</td> </tr> </table>	Mounting Height	m (ft.)	4.5 (15)	6.0 (20)	8.0 (26)	9.0 (30)	Max. Coverage Diameter	m (ft.)	13.5 (45)	18.0 (60)	24.0 (78)	27.0 (90)
		Mounting Height	m (ft.)	4.5 (15)	6.0 (20)	8.0 (26)	9.0 (30)							
Max. Coverage Diameter	m (ft.)	13.5 (45)	18.0 (60)	24.0 (78)	27.0 (90)									
														





LENS D 2X Standard

Mounting Height	m (ft.)	2.4 (8)	3.0 (10)	4.5 (15)	6.0 (20)
Max. Coverage Diameter	m (ft.)	4.8 (16)	6.0 (20)	9.0 (30)	12.0 (40)

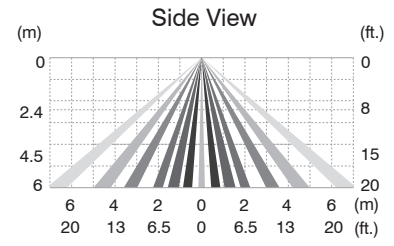





LENS F 4X Extra wide

Mounting Height	m (ft.)	2.4 (8)	3.0 (10)	4.5 (15)	6.0 (20)
Max. Coverage Diameter	m (ft.)	9.6 (32)	12.0 (40)	18.0 (60)	24.0 (80)

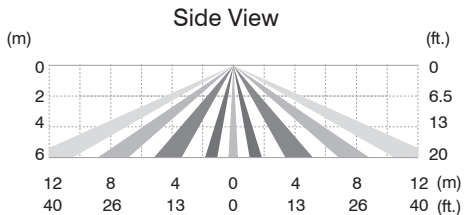

LENS G 3X Aisle way



Mounting Height	m (ft.)	3.0 (10)	6.0 (20)	9.0 (30)	12.0 (40)
Max. Coverage Length x Width	m (ft.)	9.0 x 1 (30 x 3.3)	18.0 x 2 (60 x 6.5)	27.0 x 3 (90 x 10)	36.0 x 4 (120 x 13)

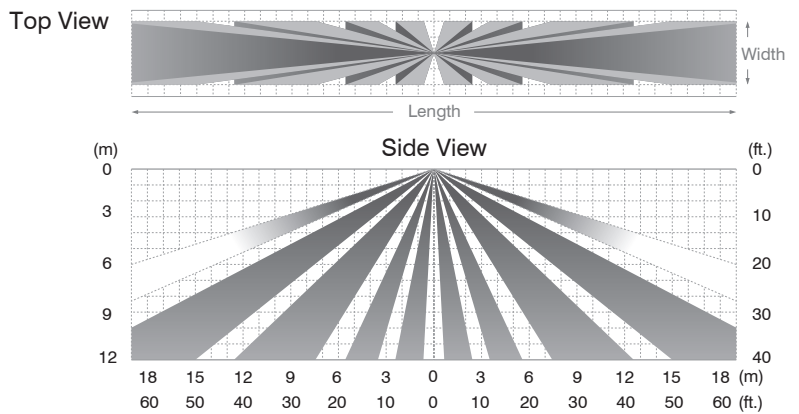

ACCESSORIES

LENS HOOD LH-110






The LH-110 is designed for bi-level control sensors to prevent its ambient light sensor from being saturated by the excessive lighting nearby.

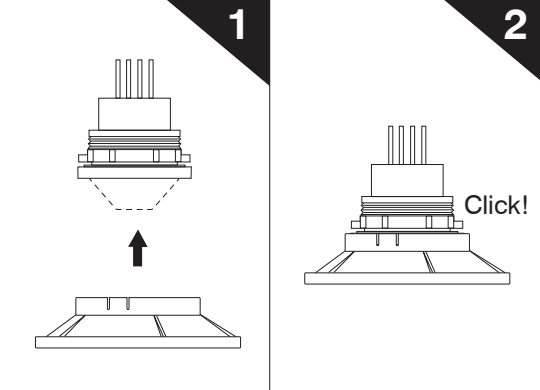


LENS MASK

LM-12C
For Lens A/B/C


LM-12D
For Lens F

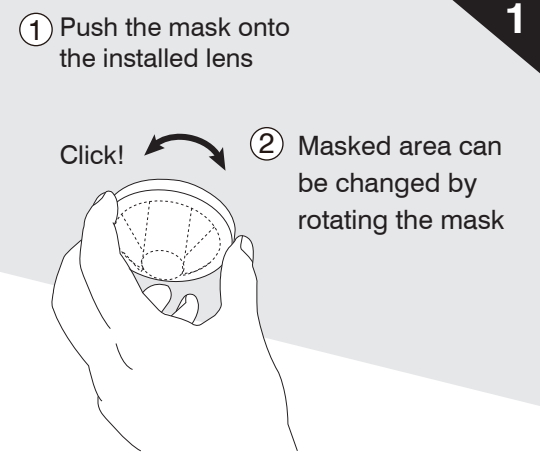

Example: Lens F with LM-12D



If necessary, the masked area can be altered by cutting off the respective grooved segments with a wire cutter or knife.

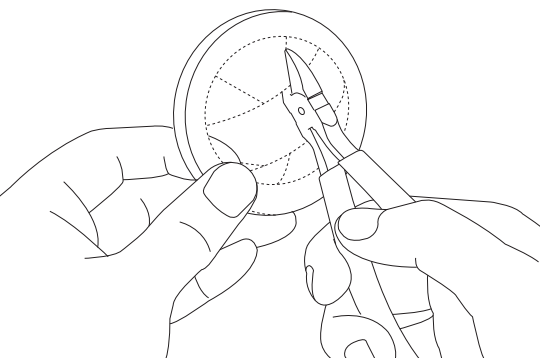

Coverage Area with Lens F and Mask

Mounting Height	m (ft.)	2.4 (8)	3.0 (10)	4.5 (15)	6.0 (20)
Max. Coverage Length x Width	m (ft.)	9.6 x 1 (32 x 3.3)	12.0 x 2 (40 x 6.5)	18.0 x 3 (60 x 10)	24.0 x 4 (80 x 13)