

## Multimode Low Speed 1300nm Optical Receiver

### Features

- 2X8 pins plastic case with ST Receptacle
- Wavelength 1300nm multimode fiber application
- Wide operating temperature range  $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- Single 5V power supply
- Receiver signal detect function



### Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit
Data Rate (NRZ)	B	5K	-	100M	b/s
Optical Input Sensitivity (avg.) <sup>(1)(2)</sup>		-	-	-32	dBm
Saturation (avg. power)		-3	-	-	dBm
Optical Wavelength	$\lambda$	1100	1310	1600	nm
Output Rise Time (10-90%)	$t_r$	-	1.5	2.5	ns
Output Fall Time (10-90%)	$t_f$	-	1.5	2.5	ns
Data Output	$V_{OL}$ $V_{OH}$	$V_{CC}-1.83$ $V_{CC}-1.035$	- -	$V_{CC}-1.62$ $V_{CC}-0.88$	V V
SD Deasserted Power Level (avg.)	$P_A$	-	-	-32	dBm
SD Asserted Power Level (avg.)	$P_D$	-40	-	-	dBm
SD Hysteresis	-	1.5	-	-	dB
SD Timing (Increasing light input)	$T_{SD+}$	-	-	100	$\mu\text{s}$
SD Timing (Decreasing light input)	$T_{SD-}$	-	-	350	$\mu\text{s}$
Supply Voltage	$V_{CC}$	4.75	5	5.25	V
Supply Current	$I_{CC}$	-	-	180	mA
Power Dissipation		-	-	1000	mW

Notes :

(1) With 0.29 NA, 62.5/125 $\mu\text{m}$  multimode fiber.

### Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
Operating Temperature	-40	85	$^{\circ}\text{C}$
Storage Temperature	-40	100	$^{\circ}\text{C}$
Lead Soldering Limits	-	240/10	$^{\circ}\text{C} / \text{sec}$
Supply Voltage	-0.2	6	V


### Ordering Information

SNS R013MM0-XSST5PR1G2

# Multimode Low Speed 1300nm Optical Receiver

## Outline Drawing & Connections

2x8Pins Plastic Case :

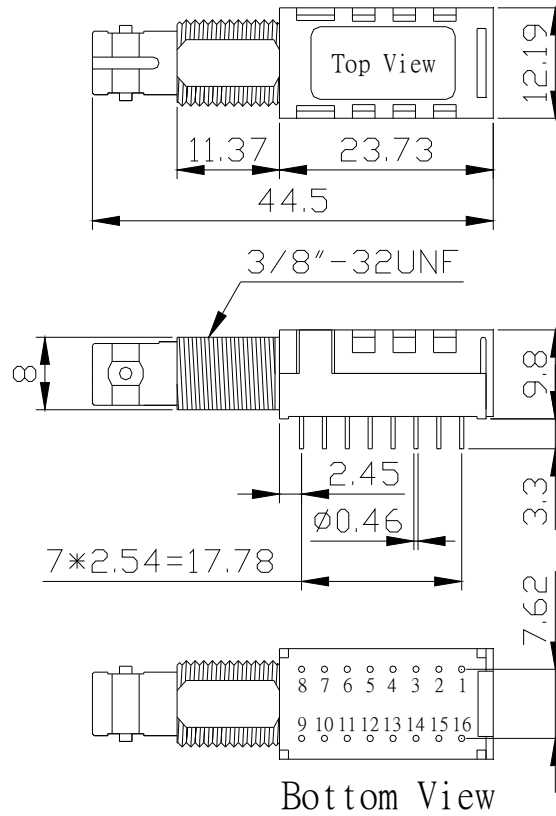

Unit:mm

Pin No.	Description	Pin No.	Description
1	No Connection	16	No Connection
2	DATA -	15	SD -
3	DATA +	14	SD +
4	V <sub>CC</sub>	13	GND
5	V <sub>CC</sub>	12	GND
6	V <sub>CC</sub>	11	GND
7	GND	10	No Connection
8	No Connection	9	No Connection