



↑ indicates the attractive face.

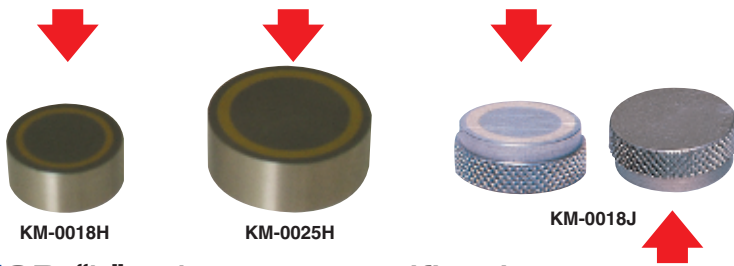

An example of application

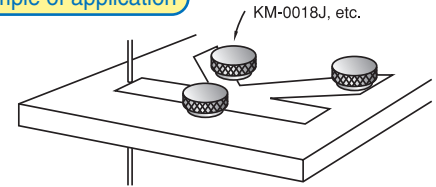

These holders can be used to hold pieces cut out by wire cutting to prevent them from moving or falling from the securing area.

### OD "h" tolerance specification

Model	Dimensions			Holding Power	Surface Treatment	Mounting Tapped Hole	Workable Range				Upper Limit of Working Temp.	Tapping	Mass
	OD × Height	"h" tolerance	Height tolerance				D <sub>1</sub>	D <sub>2</sub>	H <sub>1</sub>	H <sub>2</sub>			
KM-0005	φ5 (0.19)h7 (0.27) × 8 (0.31)	-0.012	0 -0.1	0.3N (0.03kgf)	None	None	5 (0.19)	4.5 (0.17)	—	—	Type B	Not allowed.	1.5g/0.003 lb
KM-0007	φ7 (0.27)h7 (0.27) × 8 (0.31)	-0.015		0.4N (0.04kgf)			7 (0.27)	6.5 (0.25)					2.5g/0.005 lb
KM-H001	φ10 (0.39)h9 (0.35) × 15 (0.59)	-0.036		8N (0.8kgf)			10 (0.39)	9.5 (0.37)					11g/0.024 lb
KM-H0015	φ15 (0.59)h9 (0.35) × 15 (0.59)	-0.043		20N (2kgf)			15 (0.59)	14 (0.55)					20g/0.044 lb
KM-H002	φ20 (0.78)h9 (0.35) × 15 (0.59)	-0.052		40N (4kgf)			20 (0.78)	18 (0.70)					40g/0.088 lb
KM-H0025	φ26 (1.02)h9 (0.35) × 25 (0.98)	-0.052		100N (10kgf)			26 (1.02)	24 (0.94)					100g/0.222 lb

※The holding power is based on a test piece of SS400, 10 mm thick, ground surface. ※The holding power may drop when the holder is worked on additionally. In particular, additional work in the radial direction has large influence on the holding power and therefore, must be limited to a minimum necessary scope.

### Plating specification

Model	OD × Height	Holding Power	Surface Treatment	Mounting Tapped Hole	Workable Range				Upper Limit of Working Temp.	Tapping	Mass							
					D <sub>1</sub>	D <sub>2</sub>	H <sub>1</sub>	H <sub>2</sub>										
KM-0005L	φ5 (0.19) × 13 (0.51)	1.8N (0.18kgf)	Nickle plating	None	—	—	13 (0.51)	12 (0.47)	Type A	Not allowed.	2g/0.004 lb							
KM-0007L	φ7 (0.27) × 13 (0.51)	4N (0.4kgf)			7 (0.27)	6.5 (0.25)					3.8g/0.008 lb							
KM-0010H	φ10 (0.39) × 8 (0.31)	3N (0.3kgf)			—	—					5g/0.011 lb							
KM-001	φ10 (0.39) × 15 (0.59)	8N (0.8kgf)		M5 (0.19) Depth 5 (0.19) pitch 0.8 (0.03)	10 (0.39)	9.5 (0.37)	15 (0.59)	12 (0.47)	Type A	Prepared hole up to 3.0 deep on the rear face allowed.	Provided.	11g/0.024 lb						
KM-T001	φ10 (0.39) × 18 (0.70)											18 (0.70)	12g/0.026 lb					
KM-0015	φ15 (0.59) × 15 (0.59)	20N (2kgf)		None	15 (0.59)	14 (0.55)	15 (0.59)	12 (0.47)	Type A	Prepared hole up to 3.0 deep on the rear face allowed.	Provided.	20g/0.044 lb						
KM-T0015	φ15 (0.59) × 18 (0.70)											18 (0.70)	23g/0.051 lb					
KM-0018H	φ18 (0.70) × 8 (0.31)											50N (5kgf)	None	—	—	—	Type B	Not allowed.
KM-002	φ20 (0.78) × 15 (0.59)	40N (4kgf)		M5 (0.19) Depth 5 (0.19) pitch 0.8 (0.03)	20 (0.78)	18 (0.70)	15 (0.59)	12 (0.47)	Type A	Prepared hole up to 3.0 deep on the rear face allowed.	40g/0.088 lb							
KM-T002	φ20 (0.78) × 18 (0.70)											18 (0.70)						
KM-0025H	φ25 (0.98) × 10 (0.39)	90N (9kgf)		None	—	—	—	Type B	Not allowed.	38g/0.083 lb								
KM-T0025	φ26 (1.02) × 30 (1.18)	100N (10kgf)									M6 (0.23) Depth 10 (0.39) pitch 1.0 (0.03)	26 (1.02)	24 (0.94)	30 (1.18)	21 (0.82)	Type A	Provided.	120g/0.266 lb
KM-T003	φ30 (1.18) × 33 (1.29)	150N (15kgf)																M6 (0.23) Depth 8 (0.31) pitch 1.0 (0.03)

※The holding power is based on a test piece of SS400, 10 mm thick, ground surface. ※The holding power may drop when the holder is worked on additionally. In particular, additional work in the radial direction has large influence on the holding power and therefore, must be limited to a minimum necessary scope.

### Peripheral knurling specification

Model	OD × Height	Holding Power	Surface Treatment	Mounting Tapped Hole	Upper Limit of Working Temp.	Feature	Mass
KM-0010J	φ10 (0.39) × 8 (0.31)	3N (0.3kgf)	Nickle plating	None	Type B	Peripheral knurling	5g/0.011 lb
KM-0018J	φ18 (0.70) × 8 (0.31)	50N (5kgf)					16g/0.035 lb
KM-0025J	φ25 (0.98) × 10 (0.39)	90N (9kgf)					38g/0.083 lb

※The holding power is based on a test piece of SS400, 10 mm thick, ground surface.

## First in the industry! Stainless steel to resist rusting.

↑ indicates the attractive face.



Working up to 0.5 mm allowed on the attractive face.



Comparison in pure water (Left: Made of stainless steel)

### Stainless steel specification

Model	OD × Height	Holding Power	Surface Treatment	Mounting Tapped Hole	Upper Limit of Working Temp.	Tapping	Mass
KM-0010H-SUS	φ10 (0.39) × 8 (0.31)	3N (0.3kgf)	None	None	Type B	Not allowed.	5g/0.011 lb
KM-0018H-SUS	φ18 (0.70) × 8 (0.31)	50N (5kgf)					16g/0.035 lb
KM-0025H-SUS	φ25 (0.98) × 10 (0.39)	90N (9kgf)					38g/0.083 lb

※The holding power is based on a test piece of SS400, 10 mm thick, ground surface.

ELECTROMAGNETIC CHUCKS  
CHUCK CONTROLLERS  
PERMANENT ELECTROMAGNETIC CHUCKS  
MAGNETIC CHUCKS  
BLOCKS FOR MC  
VACUUM CHUCKS  
PROMELTA\* SYSTEM  
SINE BAR CHUCKS  
BLOCKS, HOLDERS, MINI CHUCKS  
HOLDING TOOLS  
MEASURING TOOL HOLDERS  
MAGNETIC HOLDERS  
MAGNETIC TOOLS