

VAPPRO[®]

VAPOUR CORROSION INHIBITOR


Your Corrosion Solution

PRODUCT INFORMATION

VAPPRO 9865-AR VCI RUST INHIBITOR

Function: Vapour Corrosion Inhibitor (VCI)	Application: Multi-metal Coating	Form: Aerosol Spray
--	--	-------------------------------

DESCRIPTION

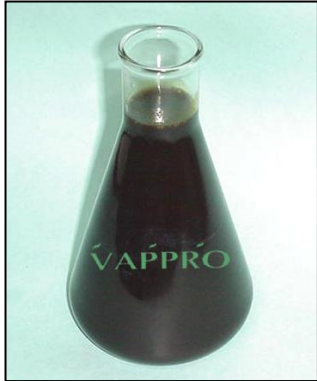

VAPPRO 9865-AR VCI Rust Inhibitor is specifically designed for corrosion protection of all ferrous and non-ferrous metals. This product is a temporary coating suitable for corrosion protection of all metal parts and machineries.

VAPPRO 9865-AR VCI Rust Inhibitor is a temporary oil-based VCI Rust Preventative Coating. It contains excellent water displacing properties and has passed the ASTM B-117 Salt Spray Test specifications. It is excellent for all industrial, off shore and marine applications.

VAPPRO 9865-AR VCI Rust Inhibitor is amber in color. Its non-staining translucent tacky-like film provides excellent long-term corrosion protection on all metal substrates for both inland and off-shore applications.

VAPPRO 9865-AR VCI Rust Inhibitor provides a tacky translucent film. It can be diluted with mineral oils. It does not contain silicones, nitrites, phosphates or heavy metals. Its thixotropic characteristic is resistant to sag and run off. It has excellent moisture displacing properties and is thermally stable over a broad range of temperatures.

VAPPRO 9865-AR VCI Rust Inhibitor has excellent UV and saline resistance properties that are suitable for both indoor and outdoor storage application.

APPLICATIONS

- Automobile underbody
- Oil rigs
- Chains
- Lawn mowers
- Spare parts
- Wire Ropes
- Tractors
- Industrial machinery

SURFACE PREPARATION & DIRECTIONS FOR USE

1. Remove all loose rust before applying
2. Make sure all surfaces are free of dirt and grease
3. We recommend bringing cold metal to room temperature before applying
4. Apply directly on all bare metal surfaces
5. For extreme environmental conditions, apply a second coat making sure the entire surface is properly covered and allow it to turn tacky
6. For best corrosion protection, 4 - 5 mils are recommended as the coating thickness for metal surfaces

REMOVING VAPPRO 9865AR FROM METAL SURFACES

The tacky film can be removed with Magna M-106 Alkaline Degreaser, Magna Citra-Solv Cleaner, other Non-Chlorinated Solvents or Hot Steam Cleaning

PACKAGING AND STORAGE


*** Keep product away from open fire and other sources of ignition.
Store in room temperature environment ***

- *Case of 12 x 400g aerosol cans

IMPORTANT NOTES

- Read Material Safety Data Sheets before using
- Shake can prior to using
- Do not smoke when using product
- Use in a well-ventilated area

WATER REPELLENCY
PROPERTIES OF V-9865-AR
FILM

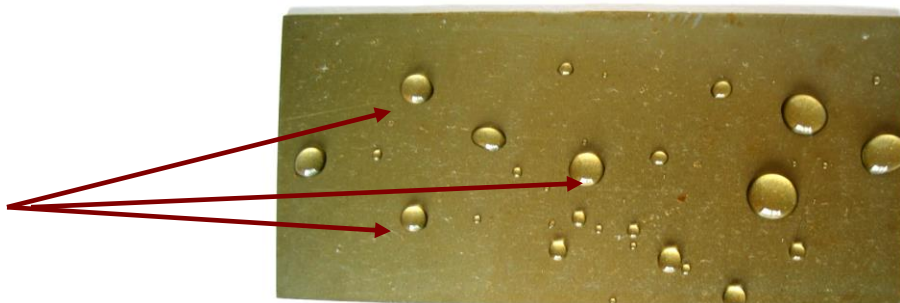

Manufacturing Facility
1450 Government Rd., West
Kirkland Lake, ON
P2N 2E9 Canada

Contact Information
T: 1 (416) 479-9151
F: 1 (888) 317-1993
E: magna@vapro.com

Websites
www.vapro.com
www.vapro.ca