


Accessory	Application	Publication No.
CENTERSTAND P/N 08M71-MKC-A00	GL1800/D/DA GL1800B/BD	MII 16426
		Issue Date
		January 2018

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

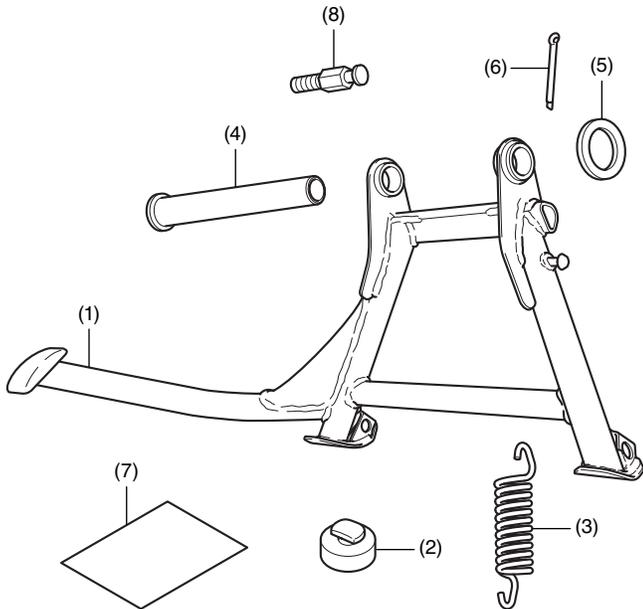

No.	Description	Qty
(1)	Centerstand	1
(2)	Stand stop	1
(3)	Spring	1
(4)	Pivot pipe	1
(5)	Washer	1
(6)	Split pin	1
(7)	Installation Instructions URL	1
(8)	Spring hook	1

TOOLS AND SUPPLIES REQUIRED

- Box-end wrench (10 mm)
- Long nose pliers
- Spring tool
- Grease
- Dish soap solution
(Water : Dish soap / 100 : 1)
- Shop towel
- Torque wrench

TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N-m	kgf-m	lbf-ft
Spring hook	22	2.2	16

INSTALLATION

▲ CAUTION


- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

NOTE:


- Be extremely careful when installing the spring as the combined tension of the spring is very strong.
- Keep the motorcycle on its side stand when installing the centerstand.
- The spring installation should be performed by two people. While one person holds the motorcycle, another person installs the spring.

1. Remove the left saddlebag guard cover as shown.


<Left side>

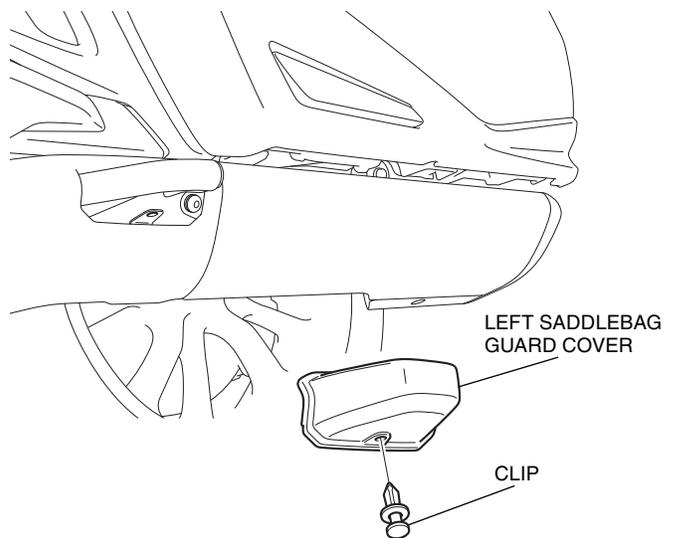

2. Remove the screw as shown.

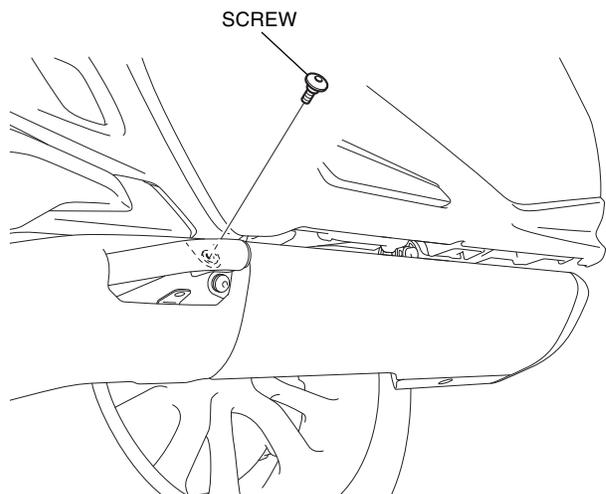


3. Remove the left exhaust pipe cover as shown.

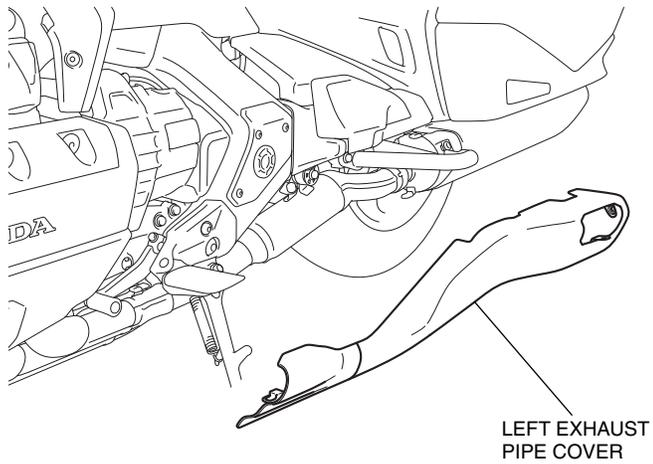


4. Remove the tube clamp as shown.

<Left side>

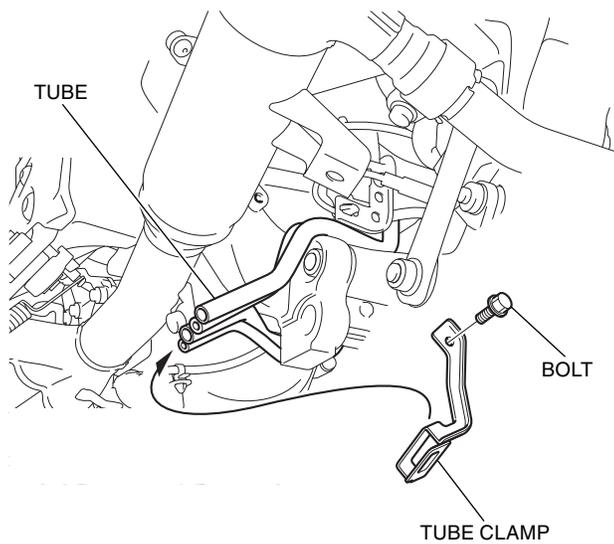


5. Apply dish soap solution to the position shown.

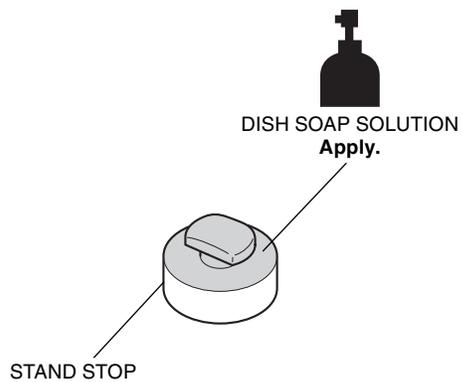


6. Install the stand stop as shown.


<Left side>

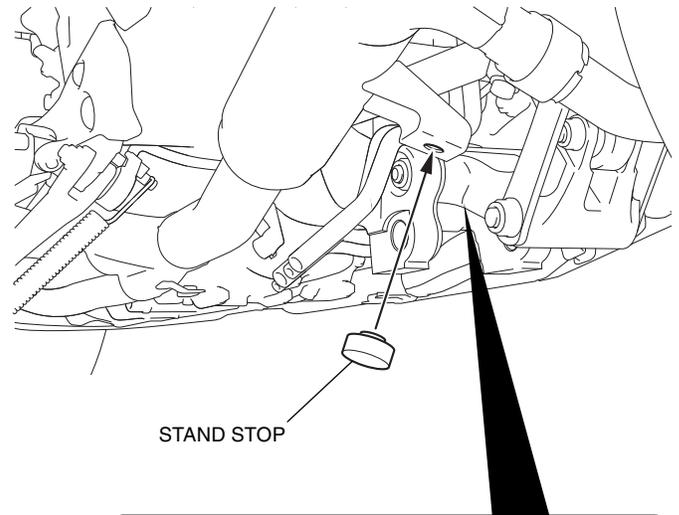


<Sectional view>

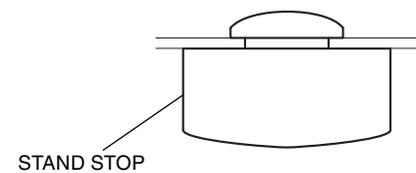

7. Apply grease to the position shown.

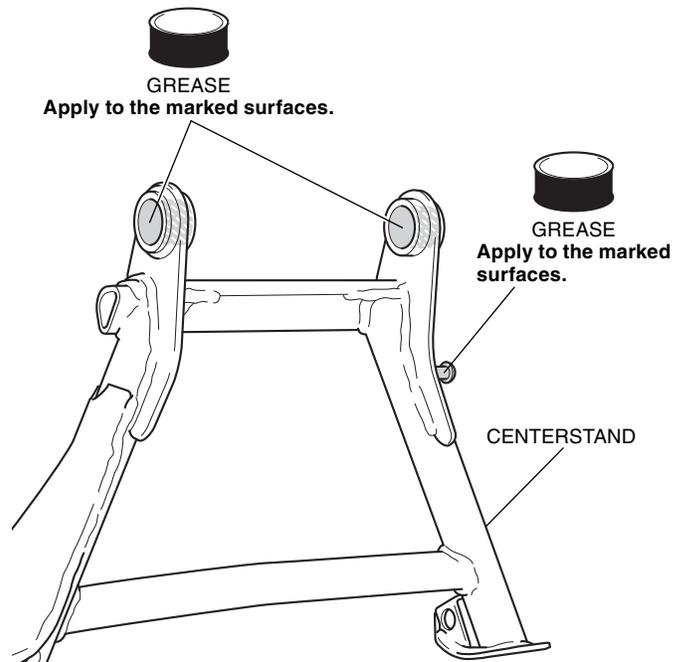


8. Install the centerstand as shown.

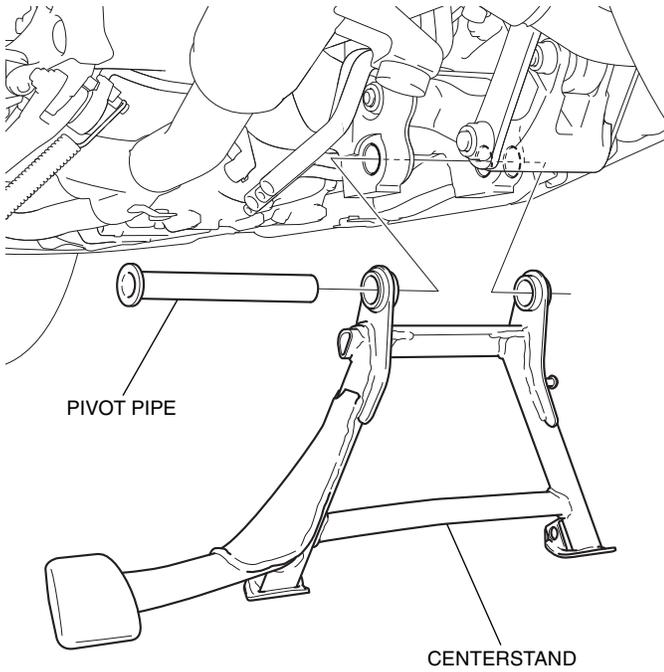


9. Install the washer as shown.


<Right side>

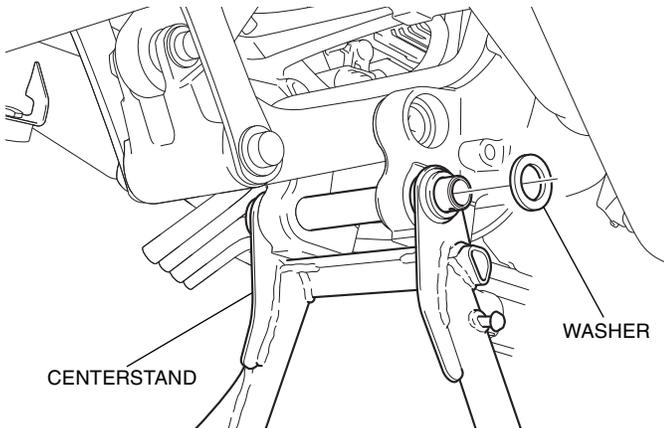


10. Install the split pin as shown.

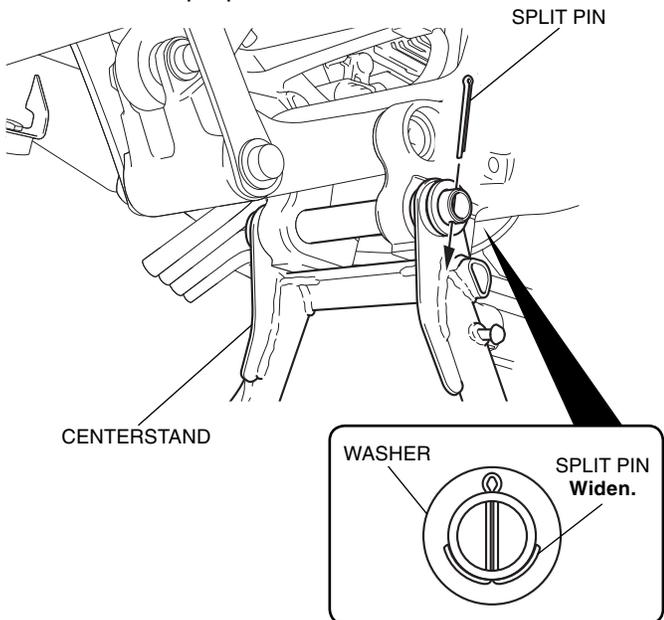

11. Install the spring hook as shown.

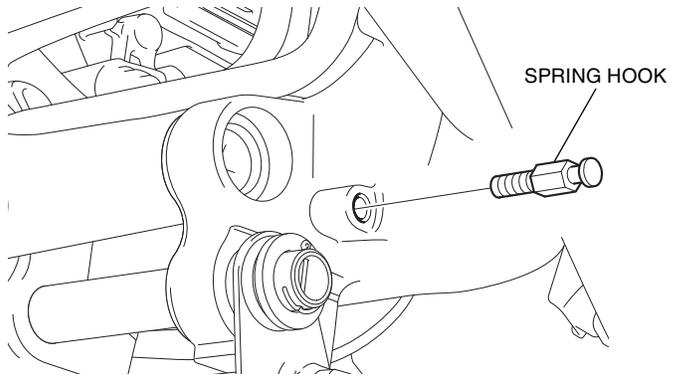


12. Apply grease to the position shown.

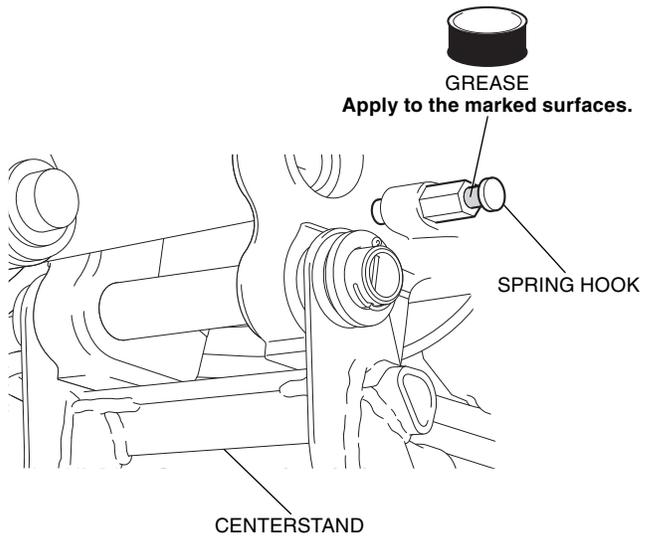

13. Install the spring as shown.

- The spring installation should be performed by two people. While one person holds the motorcycle, another person installs the spring.
- First install to the upper side spring hook, then install the spring on the centerstand.

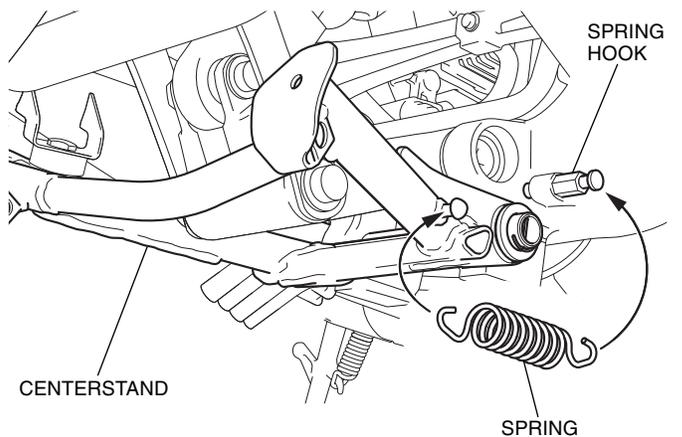

14. Install the motorcycle's parts in the reverse order of removal.