





**"FLEXIPRENE" GENERAL PURPOSE HOSE**  
Oil resisting tube, red abrasion resisting cover. EPDM rubber tube and cover for use where oil is not a factor. Our most economical hose for air and water service. Excellent for agriculture spray service. Sizes: 1/2" thru 1 1/2" in lengths up to 700 ft.



**UNIVERSAL GENERAL PURPOSE HOSE**  
EPDM rubber tube and cover for use where oil is not a factor. Our most economical hose for air and water service. Excellent for agriculture spray service. Available in black or red cover. Sizes: 1/2" thru 2" in lengths up to 700 ft.



**"GOLPRENE WB" WIRE-REINFORCED AIR HOSE**  
Extra heavy-duty air hose for high pressure service under severe operating conditions. For use in mines, quarries and heavy construction and industrial service. High visibility yellow abrasion-resisting cover and black oil-resisting tube. Specially spiraled wire reinforcement for strength and flexibility. Sizes: 1/2" thru 4" in 50 ft. lengths (1/2" - 2" available in 100' lengths).



**"AQUAFLEX" PVC WATER SUCTION HOSE**  
For heavy-duty suction and low pressure discharge in the transfer of water, slurry and small solids in the construction, agricultural, mining and marine industries. Also widely used for septic tank cleaning and sewage handling. Smooth bore, flexible, PVC, reinforced with high density spiral of PVC, fully embedded into the body of the hose. Very flexible and light in weight making this hose easily handled. Should not be used with extreme heat or cold. Sizes: 1/2" thru 8", in lengths 10 ft. to 25 ft.



**"RAINING" WATER SUCTION HOSE**  
For heavy-duty suction and low pressure discharge service in the transfer of water, slurry and small solids in the construction, agricultural, mining and marine industries. Also widely used for septic tank cleaning and sewage handling. Smooth rubber tube that will not absorb water, reinforced with multiple textile plies and helix of high tensile steel wire. Tough black rubber cover resists abrasion and weather. Sizes: 1" thru 4 1/2" - 100 ft. max., 5' and 6' - 30 ft. max., 8' thru 12' - 25 ft. max.



**"PETRO-PRENE" PETROLEUM TRANSFER HOSE**  
Used to transfer gasoline, fuel oils, paraffin and other petroleum products from storage tanks, bulk plants, trucks, and tank cars where aromatic content does not exceed 40 percent. For both suction and discharge service. Maximum temperature 180 degrees Fahrenheit. Oil-resisting nitrile tube, oil and abrasion-resistant cover. Reinforced with wire helix and multiple layers of textile. Sizes: 1/2" thru 4" in lengths up to 100 ft.



**"FLEXIBLU" WATER DISCHARGE HOSE**  
For open-end water discharge service in the construction, agricultural, mining and marine industries. Used wherever an economical, lightweight discharge hose is required. Blue PVC tube and cover with high-tensile textile reinforcement, molded into a single homogenous unit. Very lightweight and flexible. Weather, mildew and rot resistant. Does not absorb water. Sizes: 1 1/2" thru 16" in length of 25 ft., 50 ft., 100 ft., and 300 ft.



**MILL DISCHARGE HOSE**  
For open-end water discharge and light duty wash down service. Not for fire protection or for use under constant pressure or highly abrasive conditions. White circular woven polyester jacket over a smooth black rubber tube. 25 ft., 50 ft. and 100 ft. lengths. Sizes: 1 1/2" thru 4".



**"RAINING" RUBBER-COVERED WATER DISCHARGE HOSE**  
For dewatering and water service lines on construction sites, mines, quarries and industrial applications. Smooth black rubber tube, with multiple layers of high tensile textile reinforcement. Tough abrasion and weather resisting cover. 25 ft. and 50 ft. (100 ft. in some sizes). Sizes: 1 1/2" thru 10".



**SAND BLAST HOSE**  
For pressure blasting with sand, steel shot or other abrasive materials. Used in cleaning, finishing or polishing stone, steel, glass and castings.




**"U-CHEM" CHEMICAL TRANSFER HOSE**  
Heavy-duty hose used where single hose is required to transfer a wide range of solvents, acids, corrosive solutions and chemicals from storage tanks, bulk plants, trucks and tank cars. For both suction and discharge service. Maximum temperature 160 degrees Fahrenheit. UHMWPE tube, reinforced with wire helix and multiple layers of textile. Chemical, weather and abrasion resistant. EPDM cover. Sizes: 1/2" to 4" in lengths up to 100 ft.



**STEAM HOSE**  
Used for cleaning, heating, de-icing, firefighting and emergency steam service at chemical plants, refineries, steel mills, marine installations and throughout industry. Pressure of 150 PSI or 250 PSI. Sizes 3/8" thru 2" in lengths up to 50 ft.

Goldstein-Schwartz offers a variety of Hose Accessories including Trash Pump, Puddle Sucker and Long Narrow Strainers, Foot Valves, Hose Couplings and Wrenches.

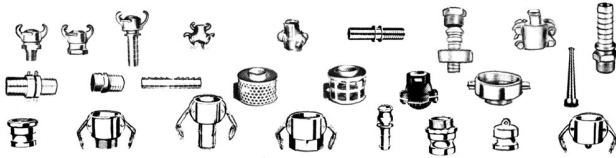

Phone: 800.467.2875 or 270.443.8243 Fax: 270.443.2134