

1800-CM-SQ8 Series

LED Architectural Ceiling Mount

Type:

Catalog Number:

Project/Location:

Approved By:

SPECIFICATIONS

Housing: Heavy-duty construction of corrosion resistant extruded aluminum. Stainless steel hardware.

Lens: Impact resistant 2447 acrylic.

Mounting: Surface over standard J-box.

Module: Sealed with heat sink.

Driver: Constant current and Universal input voltage 120-277V, 50-60Hz line voltage frequency. Operating temperature -20°C to 40°C, Power Factor $\geq .90$.

LED: Specify 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K). 40K Standard.

Lumens: 1500.

Finish/Colors: Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

Testing: LM79, LM80, ETL.

Down Light, Surface or Pendant Mounts available in various sizes. See options page for additional information or consult factory.




EMERGENCY BATTERY
BACKUP AVAILABLE


Series	Source	Wattage/Max
1800-CM-SQ8	LED	25W

ORDERING EXAMPLE


1800-CM-SQ8 – 20WLED – 30K – UNV – BZ

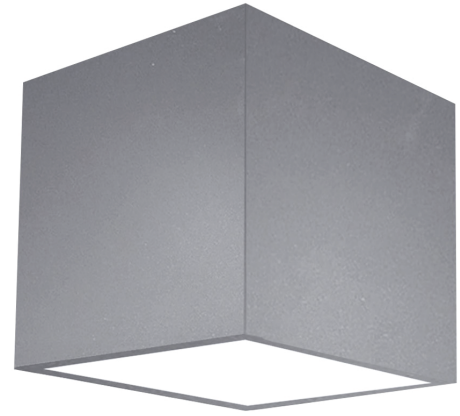

SIDE



BOTTOM/TOP



ELCAST LIGHTING

815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

Made in USA – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.

REV 09-18