

# Automatic Water Conditioner



**MADE IN  
THE U.S.A.**

## **Fleck 5600 Econominder Control Valve**

These top quality control valves are available in 24V or 110V. The regeneration cycles are automatic and dependable. Valve body and meter module are molded from glass-reinforced Noryl for exceptional strength and durability.

## **Limited Lifetime Warranty**

On pressure tanks and brine tanks, and a full 3 year warranty on parts  
(Control valve & brine tank internals).

## **Locally Manufactured by:**

Water Tec of Tucson Inc.  
From the highest quality components at our facility in  
TUCSON, ARIZONA.

## **Proven Reliability**

THOUSANDS are in service in western United States

## **Over 45 Year Reputation**

Of immaculate customer service satisfaction, integrity and  
quality!

## **Tank Jackets**

The outer covering is for U.V protection and algae inhibition on  
outdoor installations (Optional plastic or stainless steel jackets)

## **Poly Glass Tanks**

Tanks constructed of a high-density polyethylene inner shell,  
thermal wound with fiberglass. These tanks are totally non-  
corrosive!

## **Compact Space Saving**


The built-in brine tanks cabinet unit for indoor installations. The  
valve may be installed in various positions for accessibility.

# *Specifications*

MODEL	GRAINS CAPACITY	TANK SIZE	BRINE TANK	SALT USED / REGEN. CYCLE	GALLONS OF WATER USED / REGEN. CYCLE	FLOW RATE
TT 0844 56M	24,000	08X44	11X11X36	9 LBS. *	55 GAL. *	8 GPM

\*DEPENDING ON LOCAL WATER CONDITIONS

## FOOT PRINT / LAYOUT OPTIONS

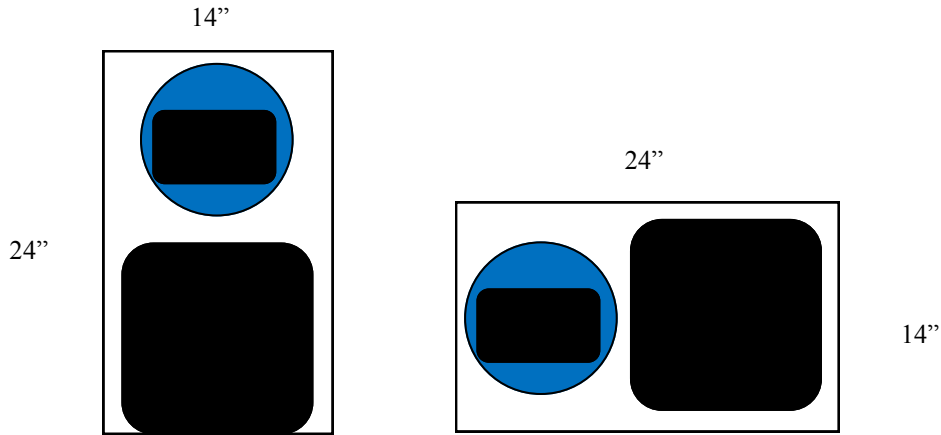

BRINE TANK CAN BE UP TO 10 FEET FROM CONDITIONER

**SYSTEM INCLUDES A 3/4" OR 1" BYPASS VALVE  
OPERATING PRESSURE IS 40 - 90 PSI @ 34F - 110F**

