

AIRDESK LAPTOP / KEYBOARD TRAY REPLACEMENT INSTRUCTIONS

Removal of old TRAY:

- 1) Loosen the SETSCREW shown on the right by 1 turn.
- 2) Unscrew the FLATHEAD SCREW.

Attach the new TRAY:

1) Remove the brown protective paper from the tray by peeling it back from a corner, use a finger nail or sharp edge to start the paper. It should come off in one piece.


2) Attach the tray to the black HUB with the FLAT HEAD SCREW, **GENTLY** TIGHTEN THE SCREW with the larger "L" wrench.

3) **IMPORTANT**

Use the smaller "L" wrench to tighten the SETSCREW in the side of the black HUB until it stops turning, then tighten it well. This locks the FLAT HEAD SCREW from turning in service.

The TRAY should rotate easily on the HUB and the FLAT HEAD SCREW should not loosen or tighten when you rotate the tray.

4) Screw in the stops provided, not shown.

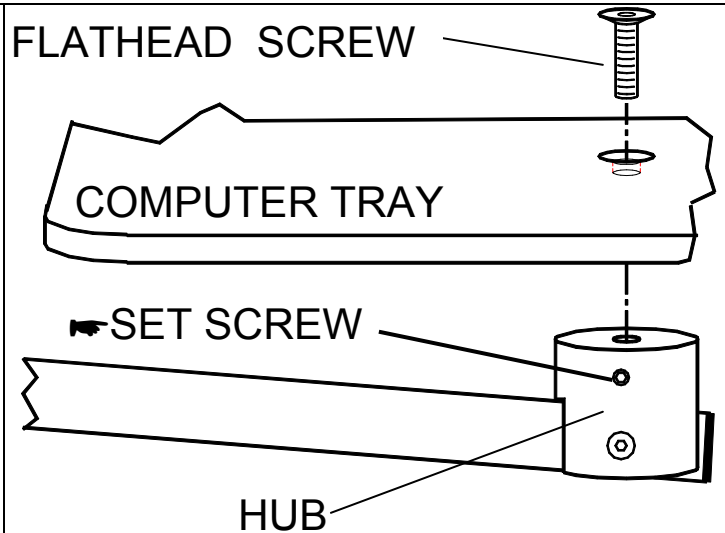

Dear Customer,

Thank you for purchasing your AirDesk. I hope you will enjoy using your AirDesk as much as I enjoy using my AirDesks. I have one at home and one at work. I would like to hear from you. Please feel free to contact me with your feedback or if you have any questions. If you are happy with your AirDesk, tell your friends, if you are unhappy, tell me. Thank You and Enjoy !

Sincerely, Ed MacLeod, President