

|          |           |
|----------|-----------|
| Project: | Type:     |
| Date:    | Comments: |

GENERAL: Indoor Architectural LED Fixture, Pendant, Surface Mounted and Recessed Installations.

LED: Samsung LED Chips, 2700-5000K, Dynamic White and RGBW Available, 80CRI (90 optional)

OPTICAL: Direct Illumination, 15°, 30°, 45° Beam Angle Options

CONSTRUCTION: High Grade Aluminum Extrusion 2.6 x 3.5" with Array of 2" Round, 3W Spotlights, Die Cast End Caps, PMMA Diffuser, Intergral Driver, Powder Coat Finish.

\* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.




| Model #                      | Length | Wattage | Distribution | Lumen Output |
|------------------------------|--------|---------|--------------|--------------|
| TechoLED-BX-3R-D-2-15-30-U-D | 2ft    | 15W     | Direct       | 1425lm       |
| TechoLED-BX-3R-D-4-18-30-U-D | 4ft    | 18W     | Direct       | 1710lm       |
| TechoLED-BX-3R-D-6-24-30-U-D | 6ft    | 24W     | Direct       | 2280lm       |
| TechoLED-BX-3R-D-8-30-30-U-D | 8ft    | 30W     | Direct       | 2850lm       |

### Ordering Guide




| 1-FIXTURE ID                           | 2-DISTRIBUTION  | 3-LENGTH   | 4-WATTAGE  | 5-COLOR TEMPERATURE   | 6-BEAM ANGLE   |
|--|---|--|--|---|--|
| BX-3R                                  | D - Direct  | 2 - 2ft<br>4 - 4ft<br>6 - 6ft<br>8 - 8ft<br>C - Custom             | 15 - 15W<br>18 - 18W<br>24 - 24W<br>30 - 30W<br>C - Custom Wattage /Lumen Output                     | 27 - 2700K<br>30 - 3000K<br>35 - 3500K<br>40 - 4000K<br>50 - 5000K<br>D - Dynamic/Tunable White<br>DT - Lutron Digital T-Series<br>Dynamic/Tunable white driver<br>RGB - RGB  | 15 - 15°<br>35 - 35°<br>45 - 45°   |
| 7-VOLTAGE                              | 8-FINISH  | 9-MOUNTING   | 10-DRIVER OPTIONS  | 11-OPTIONS  | 12-OPTIONS (CONT.)   |
| U - Universal<br>110-277V<br>HV - 347V | S - Silver<br>W - White<br>B - Black<br>C - Custom (RAL#) | P - Pendant (aircraft cables)<br>S - Surface Mount<br>R - Recessed | D - 0-10V Dimming<br>DA - Dali<br>LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to-Black dimming | DFCSJ-OEM-RF - Lutron Vive In-Fixture control (RF only)<br>FCJ/FCJS-ECO - Lutron wireless PowPak (EcoSystem)<br>FCJ/FCJS-010 - Lutron RF PowPak (0-10V)<br>DFCSJ-OEM-OCC - Lutron Vive In-Fixture control (with daylight & occ/vac sensors) | EM - Emergency Battery Backup (remote)<br>M - Motion Sensor (remote)<br>BM - Bluetooth Mesh Smart Wireless Control by BubbyNet |

|          |           |
|----------|-----------|
| Project: | Type:     |
| Date:    | Comments: |




TOP VIEW



SIDE VIEW





SIDE VIEW



BOTTOM VIEW


| FIXTURE ID                   | A    | B    | C   |
|------------------------------|------|------|-----|
| TechoLED-BX-3R-D-2-15-30-U-M | 3.5" | 2.6" | 24" |
| TechoLED-BX-3R-D-4-18-30-U-M | 3.5" | 2.6" | 48" |
| TechoLED-BX-3R-D-6-24-30-U-M | 3.5" | 2.6" | 72" |
| TechoLED-BX-3R-D-8-30-30-U-M | 3.5" | 2.6" | 96" |

### Configurations



|          |           |
|----------|-----------|
| Project: | Type:     |
| Date:    | Comments: |

### Photometrics

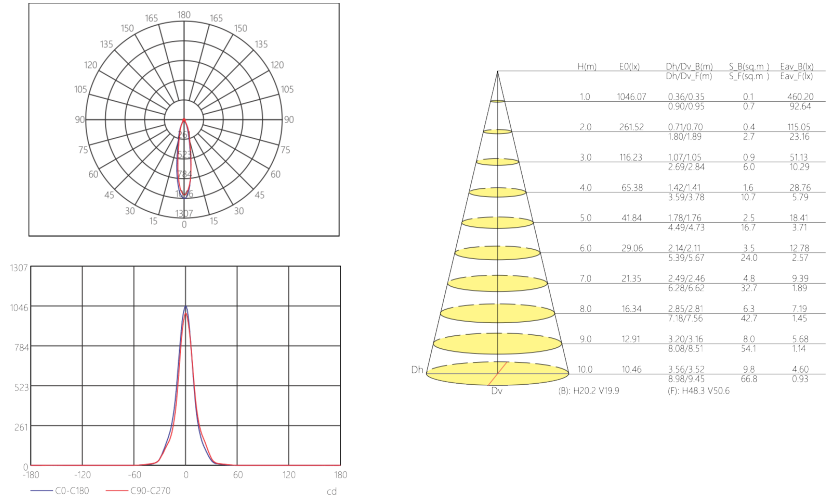

### Accessories

|          |                                      |
|----------|--------------------------------------|
| BX-3R-AC | Pendant hanging kit (aircraft cable) |
|----------|--------------------------------------|

As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.