


Vinyl application instructions


1.) Use small pieces of masking tape to position premask graphic in desired location.




2.) For horizontal decal (shown), apply a masking tape strip vertically at the center of the premasked graphic, creating a hinge point

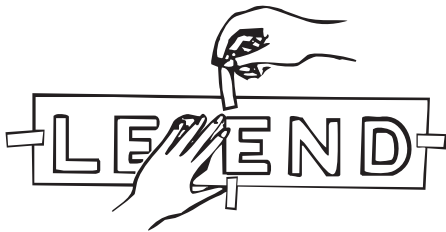

3.) Starting at the left side, remove the masking tape applied in step 1. Now fold all layers over and gently peel away the bottom liner paper at a 180 degree angle toward the center tape hinge. Make sure that the exposed vinyl is secure to the top premask layer then cut away the bottom paper liner.

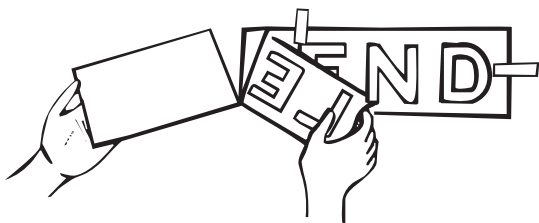

4.) Beginning at your center hinge, holding the squeegee at a 45 degree angle, with firm even pressure, squeegee the remaining 2 layers of material from right to left

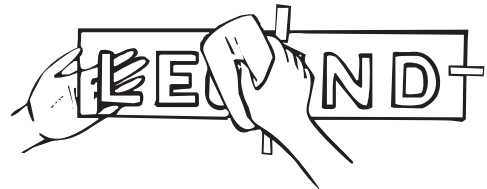

5.) After the the first half of the graphic is completely squeegeed, remove the remaining masking tape. Starting at the center hinge point, fold back the graphic and gently remove the remaining bottom liner paper

6.) Starting at the center, holding the squeegee at a 45 degree angle, with firm even pressure, squeegee the remaining half of the decal in a top to bottom motion.



7.) When you have completely squeegeed the entire graphic, slowly begin to remove the top masking material, keeping this layer close to the surface as you gently pull it away at a 180 angle from the surface in a continuous motion

