



EXPERIENCE THE EXCEPTIONAL

Plan 53B

Insulation Jacket



Features

- Reduces system temperature fluctuations
- Highly effective in applications wherein the vessel is exposed to solar radiation
- Allows a more accurate pressure reading
- Reduces the differential pressure between the product and system pressures



The Plan 53B Insulation Jacket reduces the temperature fluctuations of 53B vessels, often caused by diurnal and/or seasonal changes. It is also highly effective in applications wherein the vessel is exposed to solar radiation.

By reducing these fluctuations it provides two key advantages:

- It allows a more accurate pressure reading to be taken, and thus more accurate fill levels to be obtained.
- It reduces the differential pressure between the product and system pressures, increasing seal life.

How it Works

It is a two-part product with a main jacket and “top-hat”. The main jacket is installed around the vessel and fastened using the Velcro flap and “D” buckle straps. The drawstrings are pulled tight to ensure a secure fitting.

The “top-hat” is then placed on top and fastened using the Velcro strap and draw string.

Specifications

Inner Material

Thermal Conductivity: 0.033 W/mK

Reaction to Fire: A1 Performance in accordance with EN 13501-1 A


Combustability: Non-Combustible in accordance with EN ISO 1182:2001 Class 0 according to BS476: part 6 1989 and part 7 1997

Outer Material

Silver Silicone Rubber coated glass fibre fabric

Temperature resistance: -37°C to +200°C

Combustibility: Class 1 surface spread of flame to BS 476 Part 7

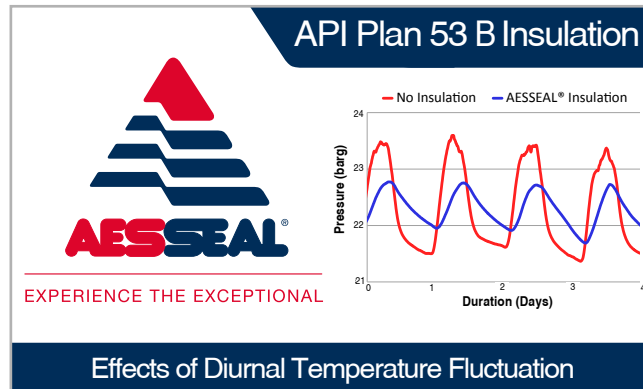

For further information and safe operating limits contact our technical specialists at the locations below.



Use double mechanical seals with hazardous products.

Always take safety precautions:

WARNING

- Guard your equipment
- Wear protective clothing

UK Sales & Technical advice:

AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham, S60 1BZ
United Kingdom
Tel: +44 (0) 1709 369966
Fax: +44 (0) 1709 720788
E-mail: seals@aes seal.com

Distributed by:

“Our purpose is to give our customers such exceptional service that they need never consider alternative sources of supply.”



USA Sales & Technical advice:

AESSEAL Inc.
355 Dunavant Drive
Rockford,
TN. 37853
USA
Tel: +1 865 531 0192
Fax: +1 865 531 0571
E-mail: usa@aes seal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.