




## NANNA-WL220205

### 2W UP AND DOWN WALL SCNCE

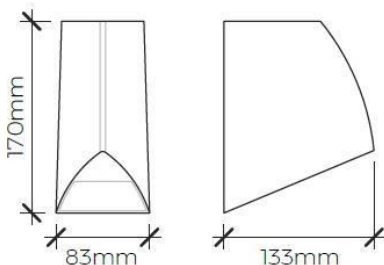

### PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminum
Fixture Finish	Powder-coated bronze
Glass	Clear Glass
Driver	Built-in
Binning	3 Step MacAdam
Wiring	Attached wiring compartment
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	2W
Input Voltage	180~250V AC, 50/60Hz
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
2W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	40°

#### Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.