




ZIYA-TL220018

3W COMPACT RECESSED UP OR DOWN LIGHT



PRODUCT SPECIFICATIONS

Trim Material	Grade 316 Stainless Steel
Trim Finish	Polished stainless steel
Glass	Tempered frosted glass
Fixture Material	Grade 316 Stainless Steel
Static Load Pressure	750kg
Binning	3 Step MacAdam
Wiring	1 meter of 2core 0.75mm rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	3W
Input Voltage	12VAC, 50/60 Hz or 12VDC
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS, ETL



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
3W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	120°

Standard option.


Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



ACCESSORIES

POLYVINYL CHLORIDE SLEEVE

Polyvinyl chloride material sleeve to be used with mini recessed trail light.

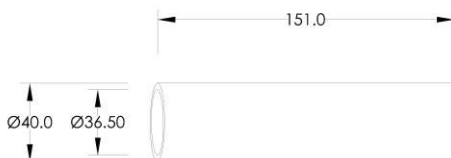

TRANSFORMER DETAILS

PRODUCT FEATURES

High Regulation	High Efficiency
Epoxy encapsulated transformer resulting in silent operation and eliminating long term corrosion.	In-line secondary magnetic breaker(s) to protect against short circuit in the lighting systems (Multi-tap only)
Auto-resetting in-line primary overload protection	Equipped with pluggable digital timer & photocell (Multi-tap only)
Life Span: 20 Years	Agency Approvals: Complies with UL 1838 for landscape lights

Model No.	Size (mm)	Power (W)	Regulation (%)	Input Voltage	Output Voltage	Output Current	IP Rating	Weight (g)
GL0017ST12-220	Ø67 x H62mm	17W	87%	220-240VAC, 50/60Hz	12VAC	1.41A	IP68	760
GL0050ST12-220	Ø70 x H72mm	50W	90%	220-240VAC, 50/60Hz	12VAC	4.17A	IP68	1270
GL0200MT15-220	L345 x W110 x D130mm	200W	93%	220-240VAC, 50/60Hz	12V, 13V & 15VAC	16.7A (max)	IP65	6240
GL0300MT18-220	L485 x W167 x D150mm	300W	94%	220-240VAC, 50/60Hz	12V - 18VAC	25A (max)	IP65	12220
GL0600MT18-220	L485 x W167 x D150mm	600W	95%	220-240VAC, 50/60Hz	13V - 18VAC	2 x 25A (max)	IP65	14450
GL1200MT18-220	L535 x W230 x D190mm	1200W	96%	220-240VAC, 50/60Hz	12V - 18VAC	4 x 25A (max)	IP65	24850

300W, 600W & 1200W MULTI-TAP TRANSFORMERS

200W MULTI-TAP TRANSFORMER

17W & 50W MAGNETIC TRANSFORMERS

