

PC-400 Series



SPECIFICATIONS

- Made in the USA
- Blow-out proof stem provides a secondary stem seal in the fully opened position
- FKM o-ring seal and PTFE back-up ring below the stem threads to protect from corrosion
- All stem threads are rolled for strength and ease of operation
- One piece bonnet with a metal-to-metal seal to the valve body below the bonnet threads
- Slotted spring pin to prevent accidental loosening
- Vinyl dust cap for bonnet and stem (non-packing)
- Available in steel and 316 stainless steel
- All stainless valves meet NACE requirements

ORIFICE SIZES

1/4" x 1/2" 0.187"

3/4" x 1-1/2" 0.438"


FLOW COEFFICIENT

1/4" x 1/2" Cv 0.44


3/4" x 1-1/2" Cv 2.70

PART NO.	SIZE	THREAD	MATERIAL
PC-402-FFC	1/4"	1/4" NPT FxF	STEEL
PC-402-MFC	1/4"	1/4" NPT MxF	STEEL
PC-403-FFC	3/8"	3/8" NPT FxF	STEEL
PC-403-MFC	3/8"	3/8" NPT MxF	STEEL
PC-404-FFC	1/2"	1/2" NPT FxF	STEEL
PC-404-MFC	1/2"	1/2" NPT MxF	STEEL
PC-406-FFC	3/4"	3/4" NPT FxF	STEEL
PC-406-MFC	3/4"	3/4" NPT MxF	STEEL
PC-408-FFC	1"	1" NPT FxF	STEEL
PC-408-MFC	1"	1" NPT MxF	STEEL
PC-410-FFC	1-1/4"	1-1/4" NPT FxF	STEEL
PC-410-MFC	1-1/4"	1-1/4" NPT MxF	STEEL
PC-412-FFC	1-1/2"	1-1/2" NPT FxF	STEEL
PC-412-MFC	1-1/2"	1-1/2" NPT MxF	STEEL
PC-402-FFS	1/4"	1/4" NPT FxF	STAINLESS
PC-402-MFS	1/4"	1/4" NPT MxF	STAINLESS
PC-403-FFS	3/8"	3/8" NPT FxF	STAINLESS
PC-403-MFS	3/8"	3/8" NPT MxF	STAINLESS
PC-404-FFS	1/2"	1/2" NPT FxF	STAINLESS
PC-404-MFS	1/2"	1/2" NPT MxF	STAINLESS
PC-406-FFS	3/4"	3/4" NPT FxF	STAINLESS
PC-406-MFS	3/4"	3/4" NPT MxF	STAINLESS
PC-408-FFS	1"	1" NPT FxF	STAINLESS
PC-408-MFS	1"	1" NPT MxF	STAINLESS
PC-410-FFS	1-1/4"	1-1/4" NPT FxF	STAINLESS
PC-410-MFS	1-1/4"	1-1/4" NPT MxF	STAINLESS
PC-412-FFS	1-1/2"	1-1/2" NPT FxF	STAINLESS
PC-412-MFS	1-1/2"	1-1/2" NPT MxF	STAINLESS

1/4" - 1/2" DIMENSIONS

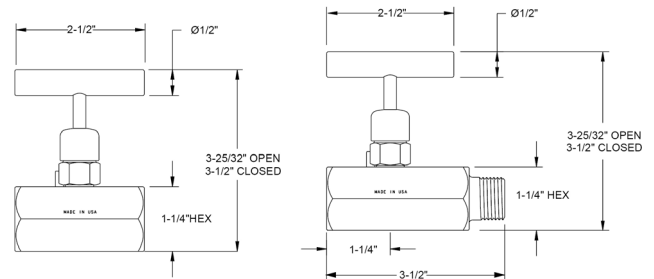

3/4" - 1-1/2" DIMENSIONS

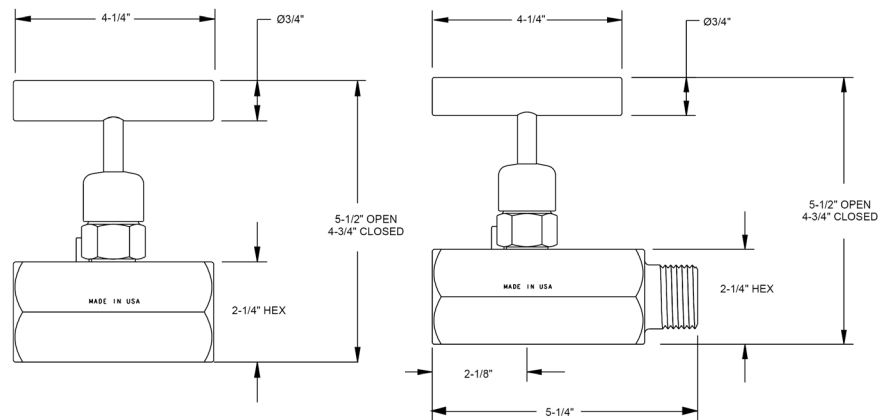

CALL FOR PRICING DETAILS

800.322.9527