




Specification		Version C
Horizontal resolution	pixels	2560
Vertical resolution	pixels	1600
Horizontal screen size	mm	645
Vertical screen size	mm	405
Diagonal	inches	30
Luminance	Cd/m ²	350
Contrast ratio	1000:1	
Input Channel	DVI DL, DP1.2, HDMI1.4	
Configuration options	Freestanding, VESA or custom panel	
Noise	0 dB (silent operation)	
Compliance	CE, FCC and ROHS class B	

The Thruput GF VT 08 provides a clear and reliable display capability, for deployment in high-density operational areas where heat and noise are carefully managed to provide the optimum working environment. Key capabilities include:

- Support for Legacy DVI DL video
- Clarity.
- Reliability.
- Minimum heat output.
- Minimum power consumption.
- Silent operation.



The GF VT 08 is available in free standing, VESA wall mount and custom panel mount versions.

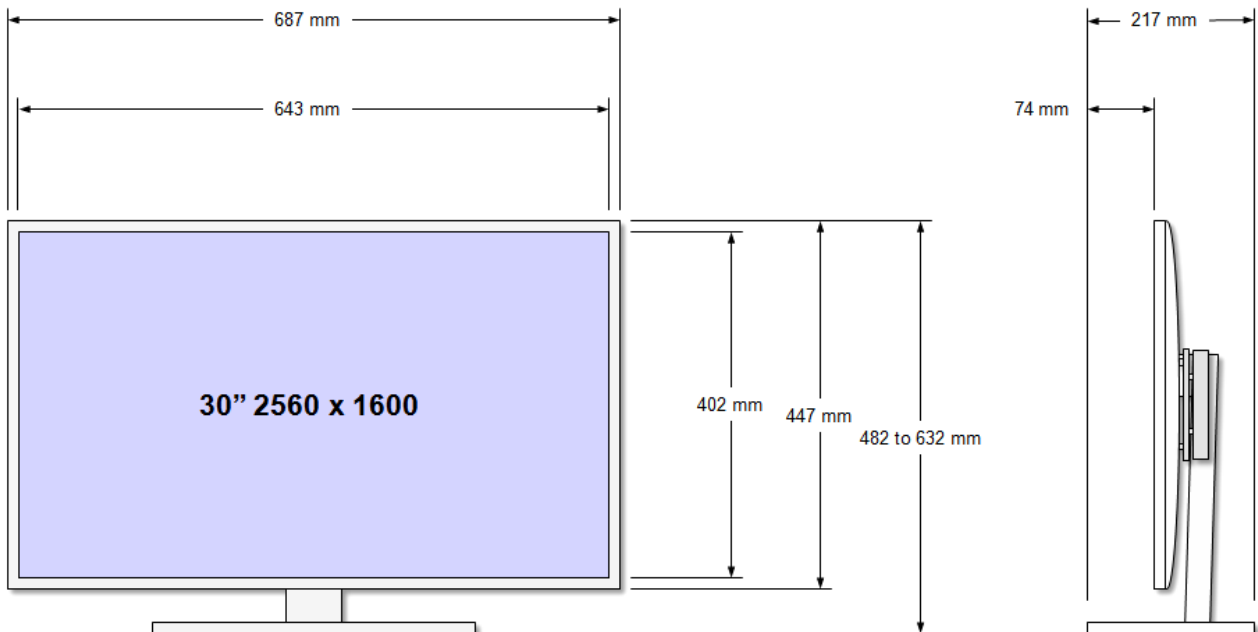

Thruput Limited operates a policy of continuous improvement and information in this document is subject to change without notice.

Page 1 of 1

Ref: GF VT 08 CD DN 1441-0000 V 1.5