



EXAMPASSED.NET

REAL SPY GEAR ALL IN ONE PLACE!




Thank you for buying Premium Spy communication kit with External

**SPY WIRELESS MICRO EARPIECE KIT
WITH EXTERNAL MICROPHONE & SIGNAL BUTTON**



SAME DAY SHIPPING

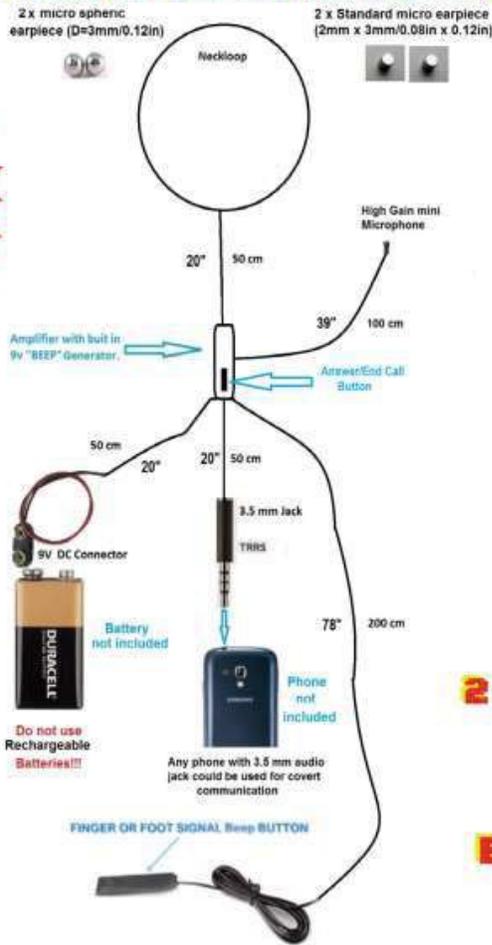


WWW.EXAMPASSED.NET

2 X PREMIUM



EARPIECES

Microphone and SOS Button.

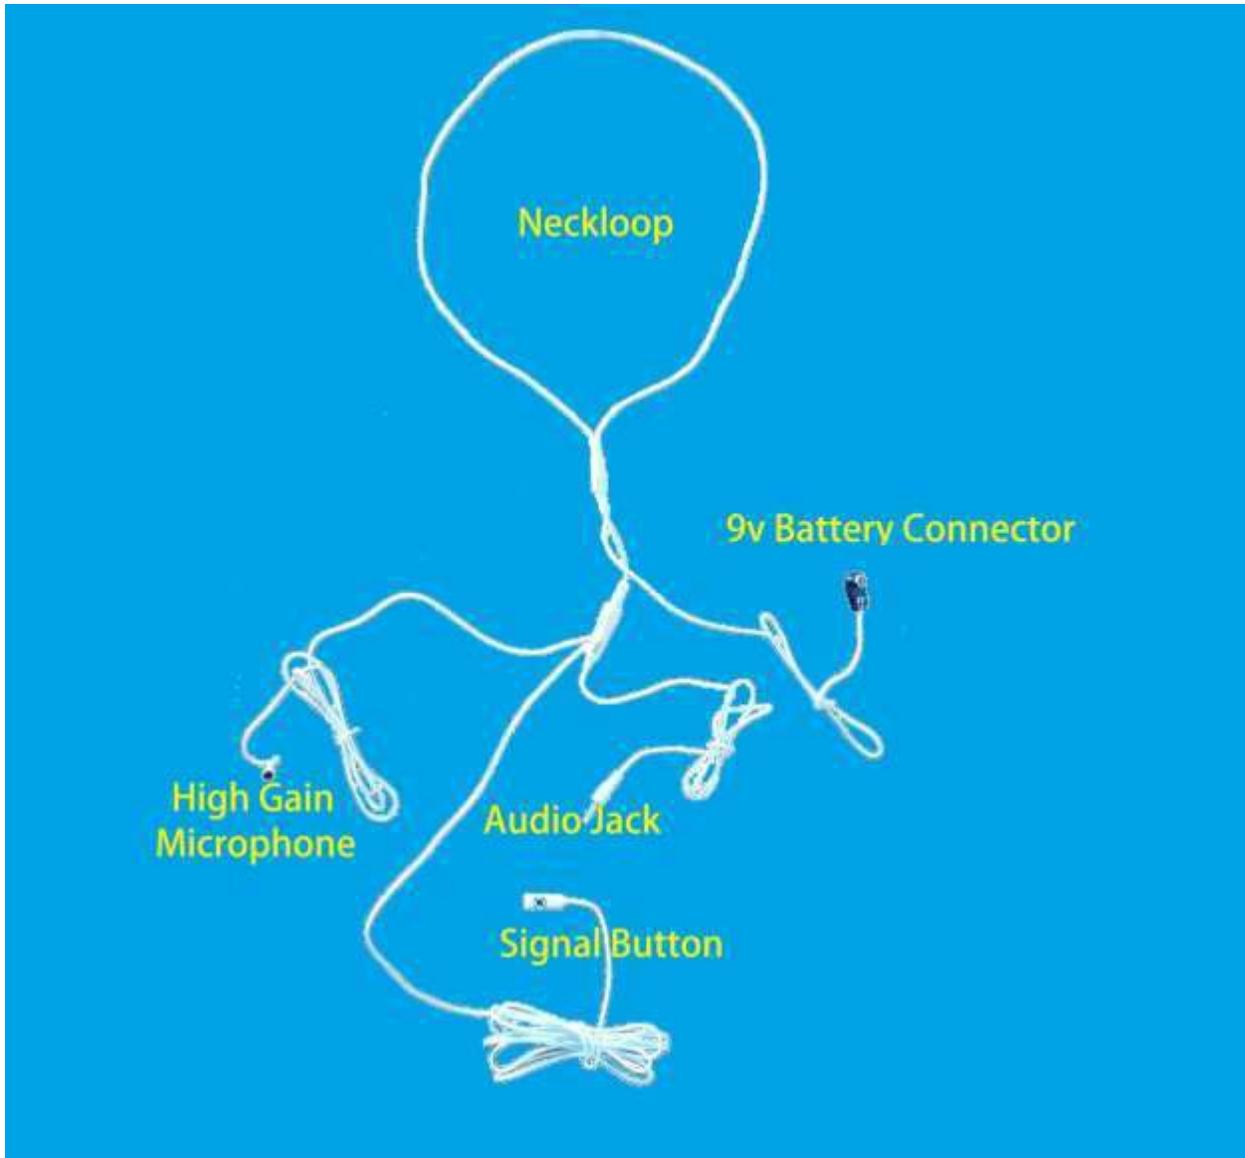

Kit contains:

1. **Wireless Mini Earpiece** device with microphone and foot or hand signal button to connect to your phone 3.5 mm audio jack. It will come with **6** earpieces in total:

2 cylindrical 0.08 x 0.12 in (2 x 3mm) earpieces and 2 spherical earpieces x 0.12 in (3 mm) in diameter which will give **you best sound** available on the spy gear market.

+ 2 Premium 0.2 x 0.2 in (5 x 5 mm) unidirectional earpieces.

2. With 2 x removal and 1x insertion tools.

3. This **Detailed step by step instruction**. PDF file will be emailed to you.

This kit could be used with a Cellphone or MP3 Player.

Device does not have any on/off power button. You just plug it in your phone audio jack and connect a 9V battery. Please scroll to last page of this manual to see list of recommended 9V batteries. Average Alkaline battery will allow you to communicate for 3-5 hours.

ENERGIZER 522



More expensive Lithium battery will allow up to 10 hours of communication.




WARNING:

- 1 DO NOT USE ANY RECHARGABLE BATTERIES with this device.**
- 2 Please disconnect 9v battery from device immediately after use!!!**

If you fail to follow these warnings your device will be permanently damaged.

6 x Earpieces do not require any battery and it's not possible to hear them from outside. Device has very sensitive microphone. Use it when it safe for you only!!!

Assemble the kit as per photo above and don the Spy Audio

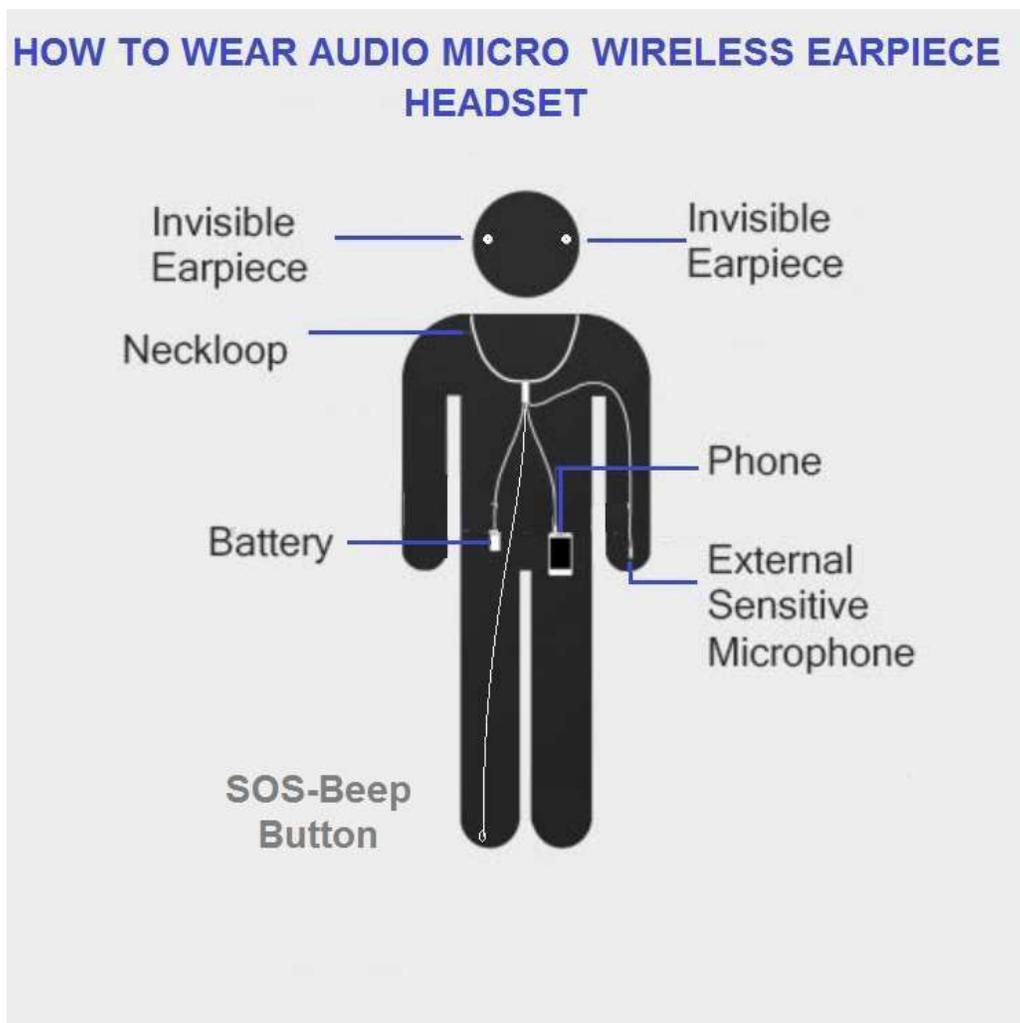

communication kit with **SOS/Signal button** as shown below:

Microphone could be put anywhere. Recommended locations are your shirt sleeve or chest.

SOS/Signal BEEP button could be put anywhere. Recommended locations are your shirt sleeve or under your toe. Wear shoes which will allow free movement of your toe.

Best way to secure **cables, microphone and signal button** to your body by means of duct tape.



Attach SIGNAL Button to your toe with duct tape so the button will face your shoe sole as shown.



Note: Use extra length of cable for joints: elbows and knees.

This will prevent cable from getting torn apart and will allow free movement in your joints.

CALL your CELL PHONE number, which is used for covert communication (XXX) XXX-XXX to check audio communications and beeps. Adjust your cell phone volume as required. Ask someone to call your cell phone number or just use your landline home phone, call yourself and place home phone close to TV, Radio and etc... and walk away from source of sound and then listen to source of the sound via invisible earpieces.

HINT 1: Call your mobile network provider toll free number for Tech Support or Billing Inquiries and listen to a robocall. For example, for Telus Canada Tech Support number is *611. So you can test your device for free and without bothering your relatives or friends.

HINT 2: If for some reason the volume from your Smartphone is not



Ultimate Volume Booster

porrassoft Tools

★★★★☆ 251,959

3+

 Add to Wishlist

 Install

Equalizer+ – great volume booster sound effects and visualizer for music fans

By Pensberg System LP

[View More by This Developer](#)

Open iTunes to buy and download apps.



[View in iTunes](#)

Description

NEW! DOWNLOAD! Equalizer is a new generation app that will extend your player's capabilities and will drastically improve the sound quality! Specifically designed for your iPhone, iPad, and iPod, Equalizer app will allow you to get the most out of your player's features and get maximum enjoyment from music!

[Equalizer+ – great volume booster sound effects and visualizer for music fans Support](#)

[...More](#)

What's New in Version 1.8

iOS 9.2 / 9.2.1 updated
iPhone 6 bug fixed
iPhone 6S crash fixed



Sufficient you can Install Volume boosting application like

Or similar applications for iPhones:

Device has manual answer/end call button, it might not work with your phone model. However, you can setup your cellphone to automatically

answer incoming phone calls when audio kit connected to 3.5 mm audio jack of your phone.

You can use your Smartphone built in function or install similar application to this one:

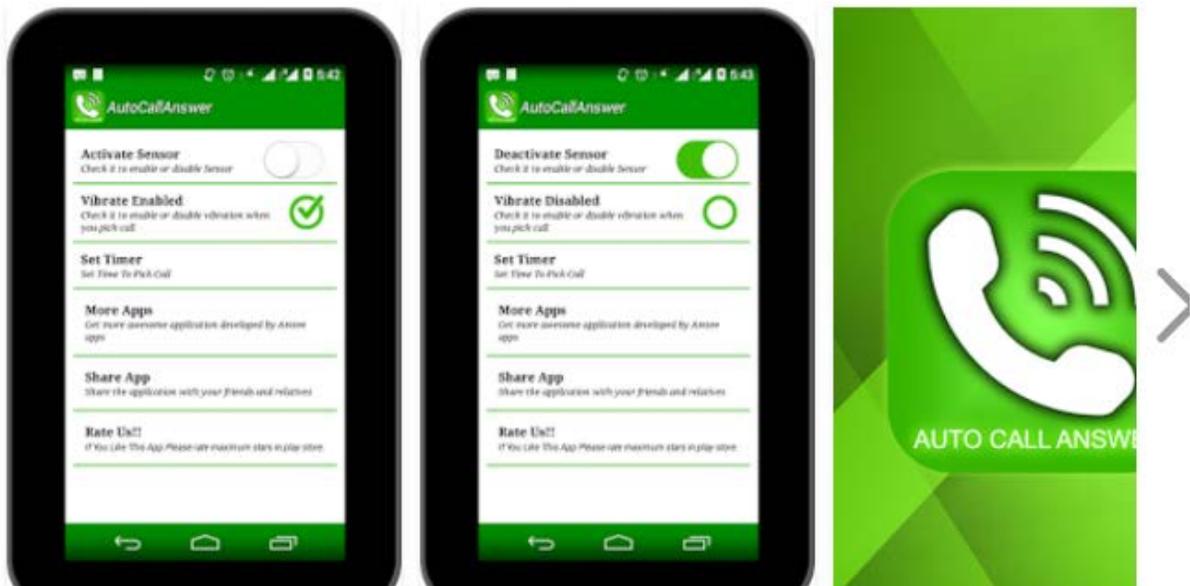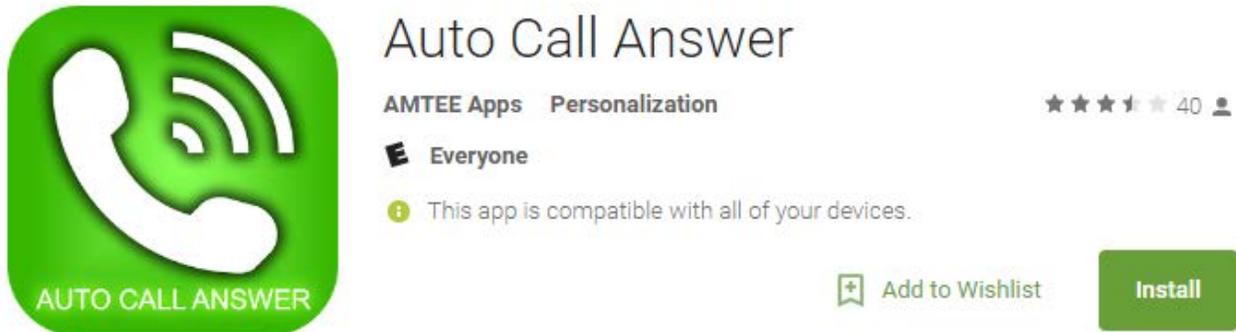

For Android devices go to **Phone Call Setup** and then to **Setup -> Accessories ->Phone Call Auto Answering Function** to **AUTOMATICALLY RECEIVE ALL INCOMING PHONE CALLS.**

For all other phone models just refer to Cellphone user manual or call technical support of your mobile service provider.

Below is an example for Samsung Galaxy S5:

Galaxy S5-How to enable or disable answering calls automatically feature when a headset or Bluetooth device is

connected.

1. From the Home screen touch **Apps**.

2. Touch **Phone**

3. Touch **Menu. Select Settings**


4. Select **Call**.

5. Select **Call Accessories**



For iPhone users:

Set Incoming Calls to Headset on Your iPhone with iOS 7 Beta [iOS Tips]

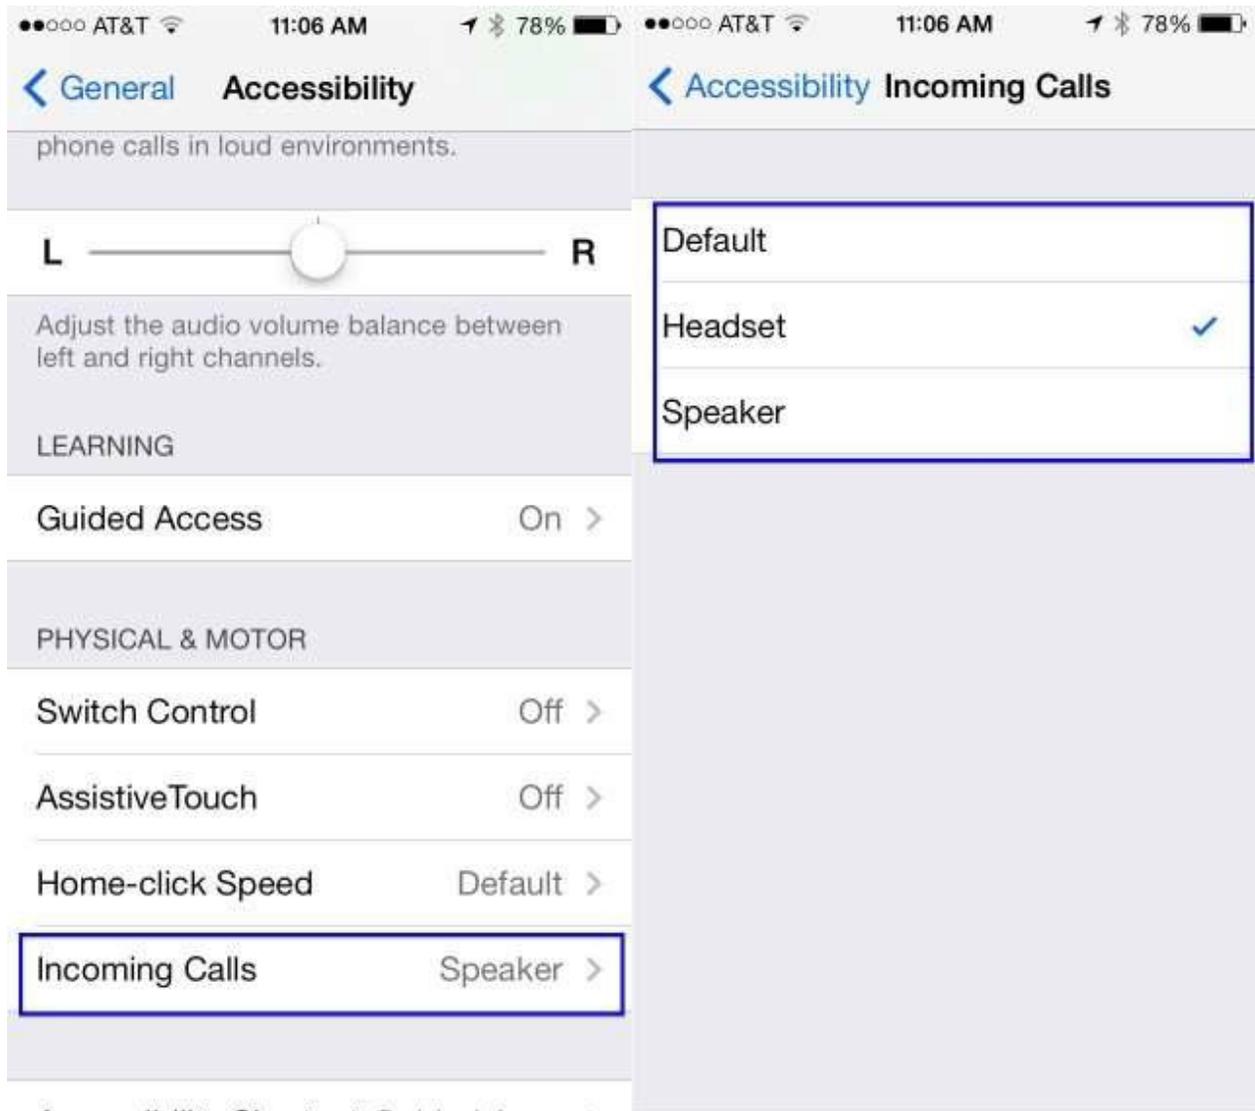

We recommend buying and using new SIM card with new phone number known to you and your assistant only. This will prevent unwanted phone calls from any third party.


Insertion and removal of cylindrical 0.08 x 0.12 in (2 x 3mm) earpieces is similar to insertion and removal of Spherical earpieces.

How to insert the Spherical Earpiece.

- ① Position insertion tool vertically and drop the Spherical earpiece inside the insertion tool as shown



- ② Carefully insert the insertion tool under slight angle inside your ear 7-10 mm deep as shown.



- ③ Tilt your head towards floor and allow Spherical earpiece to drop in your ear as shown. You should hear how ball hits your eardrum. That's it. You did it!!! Remove insertion tool.




How to remove the Spherical Earpiece.

- ① Attach 5 x 5 mm (0.2 x 0.2 inch) cylindrical earpiece to the end of removal tool end as shown.



- ② Slowly and gently Insert Earpiece removal tool approx. 1cm or 0.4 inch inside the ear canal. The Spherical Earpiece will get attracted to large Cylindrical Earpiece. Withdraw earpiece removal tool from your ear.

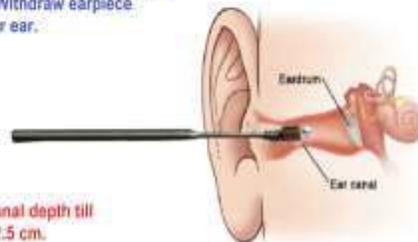


NOTE: Average person ear canal depth till Eardrum is around 1 inch or 2.5 cm.

Insertion process for
0.2 in (5 x 5 mm)
simple.



Premium 0.2 x
earpieces is



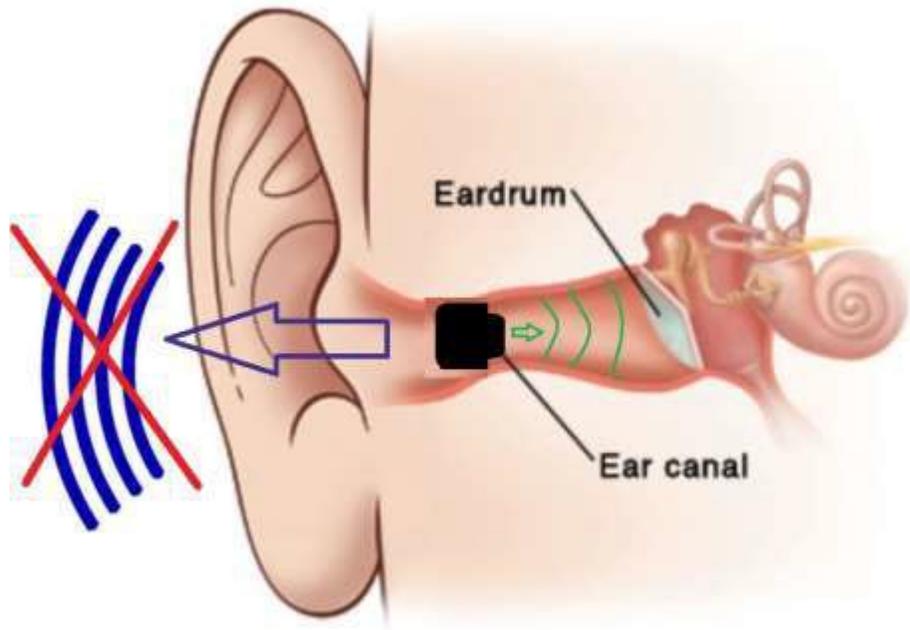

Put your earpiece as shown above and below till it will not be invisible in



your ears:

Use Earpiece removal tool to extract Premium earpiece.

Note: when you use Premium UNIDIRECTIONAL Earpieces please lower your voice down, because your Ear canals will be partially blocked by earpieces and instinctively you will try to speak louder. Please control yourself. To avoid this you can put 1 Premium and 1 Spherical Earpieces in different ears.

Troubleshooting:

Earpiece volume is not sufficient:

To boost sound do the following:

1. Increase your phone volume to maximum level.
2. Clean your ear canals.
3. You could install sound booster Application on your phone. Please read above.
4. Use smallest earpieces: spherical or cylindrical. It is safe to use them. Do not insert earpiece removal kit for more than **2cm** in your ear canal. Please see above insertion and removal instruction.
5. For maximum sound you can buy battery amplified device from us: <http://exampassed.net/products/3-mm-invisible-amplified-standard-earpiece-kit-with-removal-tool>

7 mm Invisible Amplified Battery powered Earpiece kit with 337 battery



6. Position neckloop closer to your ears.
7. Always use new battery for your exam. Battery voltage should not be less than 9V. Please see our battery guide below

WARNING. NEVER PUT any 2 Earpieces in one Ear.

They will block each other and will not work!!!

Suggested SOS/Beep communication signals:

While communicating/asking questions:

1 short beep means "YES"

2 short beeps mean "NO"

While dictating answers 1 short beep means finished writing sentence, continue dictating next sentence.

2 short beeps mean repeat last sentence.

3 short beeps mean finished with this question and go to next questions or you are dictating wrong answer.

4 short beeps mean TURN ON THE CAMERA I'll ASK YOU A QUESTION or for something IN WRITING (If you are using our covert camera)

5 short beeps or more-finished with all questions and exam.
Thank you.

one long beep means **DANGER** - stop dictating, do not talk, keep silence and wait till one short beep, which means CONTINUE DICTATING.

Hint: You can use external microphone for SOS communications as well: just simply tap on it with your finger!!!

9V Battery Guide to use with Neck Loop Device.

Type		IEC name ^[8]	ANSI/NEDA name ^[9]	Typical capacity in mAh ^[2]	Nominal voltage		
Primary (disposable) 	Alkaline ✓	6LR61	1604A	550	9		
	Zinc-carbon ✓	6F22	1604D	400			
	Lithium ✓		1604LC	1200		9.6	
Rechargeable 	NiCd	6KR61	11604	120	7.2	8.4 (some)	
	NIMH	6HR61	7.2115	175-300	7.2	some	
	Lithium polymer			520		7.4	
	Lithium-ion			620		7.4	

DO NOT USE RECHARGEABLE BATTERIES WITH THE DEVICE!!!

Enjoy your product!

Please visit: WWW.EXAMPASSED.NET for more instructions and spy gadgets including live video/photo camera.

