


MDE Semiconductor, Inc.

78-150 Calle Tampico, Unit 210, La Quinta, CA., USA 92253 Tel : 760-564-8656 • Fax : 760-564-2414
1-800-831-4881 Email: sales@mdesemiconductor.com Web: www.mdesemiconductor.com

Metal Oxide Varistors

High Energy Bare Disc 40KA Series 34mm Single Square

PART NUMBER	Varistor Voltage	Maximum Allowable Voltage		Max Clamping Voltage (8/20 μ S)		Max. Energy (J)	Max Peak Current (8/20 μ S)		Typical Capacitance (Reference)
		V@1mA (v)	ACrms (v)	DC (v)	Vc (v)		Ip (A)	1 time (A)	
MDE-34S201KBD-50	200 (185-225)	130	175	340	300	310	40000	30000	10000
MDE-34S221KBD-50	220 (198-242)	140	180	360	300	330	40000	30000	9000
MDE-34S241KBD-50	240 (216-264)	150	200	395	300	360	40000	30000	8000
MDE-34S271KBD-50	270 (243-297)	175	225	455	300	390	40000	30000	7100
MDE-34S301KBD-50	300 (270-330)	195	250	500	300	405	40000	30000	6000
MDE-34S331KBD-50	330 (297-363)	210	275	545	300	430	40000	30000	4800
MDE-34S361KBD-50	360 (324-396)	230	300	595	300	460	40000	30000	5600
MDE-34S391KBD-50	390 (351-429)	250	330	650	300	490	40000	30000	5000
MDE-34S431KBD-50	430 (387-473)	275	370	710	300	550	40000	30000	4500
MDE-34S471KBD-50	470 (423-517)	300	385	775	300	600	40000	30000	4000
MDE-34S511KBD-50	510 (459-561)	320	420	845	300	640	40000	30000	3800
MDE-34S561KBD-50	560 (504-616)	360	470	925	300	710	40000	30000	3600
MDE-34S621KBD-50	620 (558-682)	390	505	1025	300	800	40000	30000	3300
MDE-34S681KBD-50	680 (612-748)	420	560	1120	300	910	40000	30000	3000
MDE-34S751KBD-50	750 (675-825)	460	615	1240	300	920	40000	30000	2800
MDE-34S781KBD-50	780 (702-858)	485	640	1290	300	930	40000	30000	2700
MDE-34S821KBD-50	820 (738-902)	510	675	1355	300	940	40000	30000	2500
MDE-34S911KBD-50	910 (819-1001)	550	745	1500	300	960	40000	30000	1800
MDE-34S951KBD-50	950 (855-1045)	575	765	1570	300	1000	40000	30000	1700
MDE-34S102KBD-50	1000 (900-1100)	625	825	1650	300	1050	40000	30000	1600
MDE-34S112KBD-50	1100 (990-1210)	680	895	1815	300	1150	40000	30000	1550
MDE-34S122KBD-50	1200 (1080-1320)	750	980	1980	300	1200	40000	30000	1500
MDE-34S182KBD-50	1800 (1620-1980)	1000	1465	2970	300	1800	40000	30000	1300

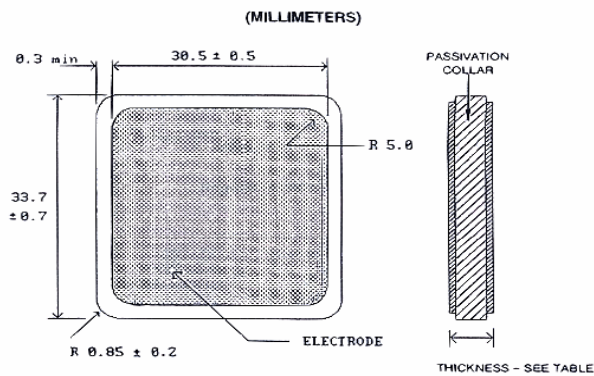

Model Size	Disc Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
34	33.7	34.4	1.330	1.360